

Rainbow Eucalyptus

2018 // Product Guide

Rainbow
Eucalyptus

Products are manufactured by Antari Lighting & Effects Ltd. : www.antari.com
For information requests please contact us at : sales@antari.com / 06620144



Antari
FOG MACHINE

Distributed by:

AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

2018 // Product Guide

Antari
FOG MACHINE

COVER STORY // Rainbow Eucalyptus

Eucalyptus deglupta is a tall tree, commonly known as the rainbow eucalyptus, Mindanao gum, or rainbow gum; it is found in an area that spans New Britain, New Guinea, Sumatra, Sulawesi and Mindanao, and is the only Eucalyptus species with a natural range that extends into the northern hemisphere. It thrives in tropical forests that get a lot of rain.

The unique multi-hued bark is the most distinctive feature of the tree. Patches of outer bark are shed annually at different times, showing a bright green inner bark. This then darkens and matures to give blue, purple, orange and then maroon tones. The previous season's bark peels off in strips to reveal a brightly colored new bark below. The peeling process results in vertical streaks of red, orange, green, blue and gray. The colors of the bark are not as intense outside the tree's native range.

All of our effects are inspired by **Mother Nature.**
All of our machines are **designed to respect her.**

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

COMPANY PROFILE

Welcome to the future of Antari.

Antari is dedicated to manufacturing and providing the highest quality special effect products from its beginning in 1984.

As a sole professional special effect products manufacturer, Antari positions itself as a world class industry leader, listens to the global market needs, and combines many years of experience with its active research and development program to enable the continuous introduction of innovative products.

Continually developing new products to meet customers' expectations has been a long tradition at Antari, as well as the emphasis on developing products that meet important environmental concerns and energy saving criteria. Antari takes seriously our corporate social responsibility and strives to incorporate innovations that "add green" as well as commercial value to every Antari product.

Continuous innovation as well as taking green concepts into consideration are strong beliefs adhered by the entire Antari team.

On behalf of every member of the Antari Team, Mr. P.F. Hung, the CEO, sincerely expresses his gratitude to all business partners, distributors and friends who have been such loyal supporters throughout the years. Antari will remain focused on providing the highest possible quality and the most innovative designs as the engines of continued growth. High quality, performance will guarantee the best effects produced, the functionalities of your surrounding equipments, and most of all, user's health.

Our mission will be providing Total Effects Solution specializing in Fog.

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

CONTENTS

New Products

2 | **HZ-1000**
Haze Machine

4 | **FT-20**
Fire Training

6 | **FT-50**
Fire Training

8 | **AF-4**
Effect Fan

10 | **LCU-2S**
Smart Liquid Control Unit



12 | **Fire Training**
FT-20, FT-50 / FT-55
FT-100, FT-200



16 | **F - Series**
F-1 Fan, F-4 Fan
F-80 Fan, F-7 Smoke



23 | **IP - Series**
IP-1000, IP-1500



26 | **M - Series**
M-1 Fogger, M-4 Fog Jet
M-5, M-6, M-10



34 | **WiFi - Series**
W1000



36 | **W - Series**
W-720 Fog Jet
W-400, W-600
W-100, W-1200, W-1500



44 | **ZII - Series**
Z-1120 Fog, Z-800 Fog, Z-2000 Fog
Z-8000, Z-10000, Z-12000
Z-15000, Z-18000, Z-20000



58 | **Low Fog - Series**
LF-100, LF-200, LF-300, LF-400



64 | **Battery - Operated Fog Machine**
M-1 Mobile Fogger



66 | **HZ - Series**
HZ-100, HZ-300
HZ-600, HZ-1000, HZ-1500



74 | **Snow - Series**
S-1000 Snow Machine
S-1000, S-2000
SN-100, S-500 / S-800



82 | **Bubble - Series**
B-100, B-1000, B-200



86 | **LCU - Series**
LCU-1, LCU-2S



88 | **AF Effect Fan - Series**
AF-1 / AF-2, AF-4 / AF-6, AF-8 / AF-10



92 | **Antari Fluid - Series**



97 | **Control Module**



101 | **Control Remotes**



104 | **Accessories**



106 | **FlightCase**
FC-100, FC-1, FC-2



107 | **Watch**



109 | **Specification Chart**

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



Distributed by:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

Hazer Technology HZ-1000

From Club to Arena.



HZ-1000 Haze Machine

HZ-1000 is the most advanced haze machine among Antari's HZ series. With the option of single or twin-compressor modes, this exceptional hazer can now be used in greater range of various venues.

The TFT color touch panel makes it much more instinct and easy when setting. More protection and convenience is provided with the wheeled flightcase while touring. Built-in turbo fan not only brings the haze higher and farther also enables the hazer to create drier haze with minimum residues. Bigger fluid tank and easy-to-see liquid level indication window both help make sure the show must go on!


Feature

- The maximum haze output is HZ-500's double. Two operational modes: Single-Compressor or Twin-Compressor mode can be selected to create needed haze volume.
- Equipped with TFT color Touch Panel provides simple control interface.
- Flight case with wheels gives better protections for tours.
- Internal turbo fan enables haze to go higher and farther. Wind diverter can be set to 3 different angles.
- Dry haze with minimum residues.
- 6.4-liter large reservoir allows long time operation without frequent refills.
- Clear liquid level indication window.

Specification

Input voltage	AC 100-120V, 50 / 60Hz 9.6A AC 220-240V, 50 / 60Hz 4.8A
Rated power	1150W
Fluid consumption	2.2 ml/min
Fluid tank capacity	6.4 l (1.69 gal)
Compatible fluid	Antari HZL Haze Fluid
Operating time	40 hrs max. output
Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
Output	7500 cu.ft./min. (212 m³/min.)
Control	DMX 512, Timer, Manual, Wireless DMX (Optional)
DMX channels	2 channels
Connection	Neutrik Powercon True1 (Power) XLR 3-pin and 5-pin (DMX)
Optional accessories	W-DMX-PCBR Wireless DMX 512
Dimension	L 690 x W 510 x H 610 mm (L 27.16 x W 20.07 x H 24.01 inch)
Weight	74.6 kg (164.46 lbs)

EFFECTS



FUNCTION



TFT Color Touch Panel

3 Positions Are Available

ACCESSORIES



W-DMX-PCB x 1
W-DMXR x 1

FLUID



HZL Haze Fluid

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

FT-20



FT-20 KIT

- FT-20 Machine
- FT-20 Charger
- FLM Fog Fluid



FT-20 Fire Training Fog Machine

Easy Use, Easy Go!

FT-20 is a battery-operated portable fog machine, capable of providing long time operations with massive fog output.

Feature

- Two power supplying modes available: DC 12 volt battery or switching power adaptor, which enables the machine to be operated in AC power environment. (between AC 100 and 240 volt)
- Switching power adaptor is an optional accessory.
- No preheat or reheat time is needed. push the button, consistent fog output can be generated right away.
- In the battery mode, the machine can produce approximately 11 minutes continuous fog output.
- In the switching power supply mode, fog output can keep going, NON-stop, as long as there are fog liquid in the tank.
- Rotary knob allows users to set the fog output volume.
- Optional remote controller with on/off and fog volume adjustment function.
- DMX control access.

Specification

- Input voltage	DC 12V (Battery) AC 100-240V, 50-60Hz (Battery charger)
- Rated power	600W
- Warm-up time	1 second (approx.)
- Fluid consumption	16 ml/min
- Fluid tank capacity	0.4l (0.11gal)
- Compatible fluid	Antari FLM Fog Fluid
- Operating time	11 mins at max. output with battery
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Control	DMX512, Manual, Wireless (Optional) Cable Remote (Optional)
- DMX channels	1 channel
- Connection	XLR 3-pin (DMX)
- Optional accessories	WTR-20 Wireless Remote Z-3 Cable Remote FT-20S Power Base
- Dimension	L293 W108 H238 mm (L11.54 W4.25 H9.37 inch)
- Weight	8.5 kg (18.74 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



EFFECTS



FT-20 FUNCTION



FT-20S FUNCTION



ACCESSORIES



WTR-20



Z-3 Cable Remote



FLUID

FLM Fog Fluid



FT-50 / FT-55 Fire Training Fog Machine

FT-50 is a compact, light-weight fog machine with tremendous output volume compare to others in its class. Off power operation feature offers fire brigade mobility to move around and fill fog in training scene.

Newly designed heater block better preserve the heat to increase operation time when off power. Simple operation with a handle-mounted button, output volume can be adjusted through knob on the back panel.

Feature

- Design for fire brigade training and applications require portability.
- Handle-mounted button for operation
- Adjustable output volume
- Compact, light weight
- Produce fog off power

FT-50 Specification

- Input voltage	AC 100-120V, 50 / 60Hz 15A AC 220-240V, 50 / 60Hz 8A
- Rated power	1450W
- Warm-up time	7.5 minutes (approx.)
- Fluid consumption	110 ml/min
- Compatible fluid	Antari FLP-700 Aerosol
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	20,000 ft ³ /min (566 m ³ /min)
- Control	Manual
- Connection	IEC (Power)
- Dimension	L346 W152 H251 mm (L13.62 W5.98 H9.88 inch)
- Weight	9.8 kg (21.61 lbs)

FT-55 Specification

- Optional accessories	FCR-1 Wireless Remote
- Dimension	L346 W152 H251 mm (L13.62 W5.98 H9.88 inch)
- Weight	10.2 kg (22.49 lbs)

EFFECTS



FT-50 FUNCTION



FT-55 FUNCTION



FT-55 ACCESSORIES



FLUID



Distributed by
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

AF-4



AF-4 / AF-4R Effects Fan

AF-4 special effect fan focusing its flow of air in the centre, produce smooth wind effect up to 20 meters. Suitable for wide variety of applications on stage, theatre, cinema, tours and much more. With a digital control interface allowing user to easily make setting and adjustments. Comprehensive control option include DMX, Timer, Wireless and Manual.

Feature

- Effective distance up to 20M
- Low noise level
- Onboard DMX
- Adjustable wind volume from 20%100%
- Manual, Timer and Wireless control

Specification

- Input voltage	AC 100-120V, 50/60Hz 0.96A AC 220-240V, 50/60Hz 0.48A
- Rated power	115W
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Air flow	1187 CFM (AC 110V/60Hz) 1035 CFM (AC 220V/60Hz)
- Fan speed	1242 ~ 1480 rpm (AC 110V/60Hz) 1175 ~ 1289 rpm (AC 220V/60Hz)
- Control	DMX, Timer, Manual Wireless (Optional)
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 5-pin (DMX)
- Optional accessories	WTR-20 Wireless Remote Z-3 Cable Remote
- Dimension	1353 W377 H517 mm (L13.90 W14.84 H20.35 inch)
- Weight	9 kg (19.84 lbs)

FUNCTION



AF-4R Effect Fan

ACCESSORIES



W-2 Transmitter x 1
W-2 Receiver x 1
For Model AF-4R Only

Z-3 Cable Remote

Distributed by:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

LCU-2S
LIQUID SUPPLY UNIT



LCU-2S Liquid Supply System

Now you can use this new liquid supply set, LCU-2S, with all the Antari fogger, fazez and snow machines regardless the model type. This makes the coverage of the application much wider.

It can supply up to 3 different machines at a time as long as the liquid used is the same. Smarter design with simpler electronic disposition greatly enhance the overall liability and make the operation as easy as pie.

Just switch it on, the liquid tank unit will always be full and you're all set. The vertical distance between the liquid tank unit and liquid supply unit can be up to 12 meters while the horizontal distance can reach 35 meters.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 0.35A AC 220-240V, 50 / 60Hz 0.18A
- Rated power	48W
- Compatible fluid	Antari Fluid
- Ambient temp. range	5 °C - 40 °C (41 °F-104 °F)
- Control	Auto
- Connection	IEC (Power) XLR 3-pin (Data)
- Dimension	Supply unit L179 W167 H84 mm (L7.05 W6.57 H3.31 inch) Tank unit L158 W103 H248 mm (L6.22 W4.06 H9.76 inch)
- Weight	Supply unit 1.95 kg (4.30 lbs) Tank unit 1.8 kg (3.97 lbs)

FUNCTION



Supply Unit



Tank Unit

SYSTEM DIAGRAM



Distributed by:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

FT-100
FIRE TRAINING



FT-100 Fire Training Fog Machine

FT-100 is the first fog machine from Antari specifically designed for fire training purpose.

Feature

- Two rotary knobs and a LCD screen are equipped on FT-100. These allow users to set and control fog output volume and timer settings with ease, even when wearing heavy-duty gloves.
- A 1500 Watt heater block is capable of generating high volume thick fog in short time to simulate dense fog at fires.
- A wireless remote controller included.
- The red paint finish gives FT-100 the identity of being part of fire industry.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 12.5A AC 220-240V, 50 / 60Hz 6.3A
- Rated power	1450W
- Warm-up time	8.5 minutes (approx.)
- Fluid consumption	100 ml/min
- Fluid tank capacity	6l (1.59gal)
- Compatible fluid	Antari FLP Fire Training Fog Fluid
- Operating time	1 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F - 104 °F)
- Output	20,000 ft ³ /min (566 m ³ /min)
- Control	DMX512, Timer, Manual, Wireless
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 5-pin (DMX)
- Optional accessories	Z-3 cable remote
- Dimension	1580 W278 H264 mm (122.83 W10.94 H10.39 inch)
- Weight	14.6 kg (32.19 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

EFFECTS



FUNCTION



ACCESSORIES



FLUID



ANTARI
FT-200
FIRE TRAINING FOG MACHINE



FT-200 Fire Training Fog Machine

Antari, a world renowned leader in entertainment atmospheric effects continues its expansion into fire and rescue training with the introduction of the all new FT-200.

Built on the success of Antari's first smoke generator developed exclusively for fire and rescue training, the popular FT-100, the new FT-200 introduces new technologies to offer one of the worlds most rugged and advanced smoke generators for fire and rescue training.

Feature

- All new advanced steel heater block that doubles the flow rate of the FT-100, essentially increasing output by 200%.
- IP rated case design that allows the FT-200 to be used outdoor.
- Sleek and compact casing design with a heavy-duty handle allows the unit to be easily transported and stored.
- Capable of multi-position operation allowing the unit to generate smoke in either a vertical or horizontal position.
- Built-in electronic timer for hands free operation.

IMPORTANT It is IP rated, only when it is operated upright (vertical position).

Specification

• Input voltage	AC 100-120V, 50 / 60Hz 13.5A AC 220-240V, 50 / 60Hz 7A
• Rated power	1600W
• Warm-up time	7.5 minutes (approx.)
• Fluid consumption	270 ml/min
• Fluid tank capacity	2.4l (0.63gal)
• Compatible fluid	Antari FLP Fire Training Fog Fluid
• Operating time	8 mins at max. output
• Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
• Output	8 meters height
• Control	DMX512, Timer, Manual, Wireless
• DMX channels	1 channel
• Connection	Neutrik Powercon (Power)
• Optional accessories	XLR 5-pin (DMX)
• Dimension	2-3 cable remote L301 W194 H414 mm (L11.85 W7.64 H16.30 inch)
• Weight	16 kg (35.27 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

EFFECTS



FUNCTION



ACCESSORIES



W-2 Wireless Remote

2-3 Cable Remote

FLUID



FLP Fire Training Fog Fluid



F-1 Fazer

A complete make over of X-310, we proudly present you F-1 Fazer equip with new technology and features from the F-Series family.

The air pump system enhance and smooth the mixture of fog liquid and air to produce fine, dry fog with minimal fluid consumption. Also enable the machine with self cleaning function to extend the lifespan of heater elements. Smart auto sensing frequency feature allow the machine to self adjust to the local frequency without the hassle to change any setting.

Feature

- 3 DMX Control Mode
 - a. Fog volume with fan at 100%
 - b. Fog and Fan volume control
 - c. Fog and Fan sync mode
- Larger tube diameter
- Built-in air pump with self cleaning function
- The stability in all details while the maturity reaches perfection
- Highest fog quality: dry and pure

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 6.8A AC 220-240V, 50 / 60Hz 3.5A
- Rated power	760W
- Warm-up time	4.5 minutes (approx.)
- Fluid consumption	8.5 ml/min
- Fluid tank capacity	2.4l (0.63gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid
- Operating time	4.5 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	6200 ft ³ /min (176 m ³ /min)
- Control	DMX512, Timer, Manual, Wireless (Optional) Wireless DMX (Optional)
- DMX channels	2 channels
- Connection	Neutrik Powercon (Power) XLR 3-pin and 5-pin (DMX) W-DMX-PCBR Wireless DMX
- Optional accessories	WTR-10 Wireless Remote Set WTR-40 Wireless DMX and W-1 Transmitter
- Dimension	L618 W275 H327 mm (L24.33 W10.83 H12.87 inch)
- Weight	14.1 kg (31.09 lbs)

EFFECTS



FUNCTION



ACCESSORIES



FLUID



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

F-4 FAZER



F-4 Fazer

F-4 the fazer is with only 1 minutes first heat-up time which makes practically no waiting before using.

The large heater tube reduces remarkably the chance of heater clog. The quick connecting design between the fluid tube and the tank saves time while changing the fluid tank.

The most splendid feature of F-4 is that now it can be controlled with multiple languages! It is always our goal to make our products as user-friendly as possible to every user around the world.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 12.5A AC 220-240V, 50 / 60Hz 6.3A
- Rated power	1450W
- Warm-up time	1 minutes (approx.)
- Fluid consumption	6.7 ml/min
- Fluid tank capacity	5l (1.32gal)
- Compatible fluid	Antari FLG-SE Heavy Fog Fluid
- Operating time	12 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	5,000 ft ³ /min (142 m ³ /min)
- Control	DMX512, Timer, Manual Wireless DMX (Optional)
- DMX channels	2 channels
- Connection	XLR 3-pin and 5-pin (DMX)
- Dimension	L545 W458 H285 mm (L21.46 W18.03 H11.22 inch)
- Weight	20.3 kg (44.75 lbs)

EFFECTS



FUNCTION



ACCESSORIES



FLUID



Distributed by:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

F-5D FAZER



F-5D Fazer

Antari is proud to present F-5D to the entertainment industry.
F-5D is the new generation of F-3.

Feature

- The haze output is 200% higher than the original F-3 and the haze flow is smoother.
- Built-in Wireless DMX receiver.
- Larger heater tubing reduces the risk of heater clogging.
- Even quieter than the original F-3. Perfect for venues where silence is golden.
- Multi-languages control interface available. More operation-friendly for users in different areas.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 6.9A AC 220-240V, 50 / 60Hz 3.6A
- Rated power	810W
- Warm-up time	4 minutes (approx.)
- Fluid consumption	8 ml/min
- Fluid tank capacity	2.8l (0.74gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid
- Operating time	5.5 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	6,000 ft ³ /min (170 m ³ /min)
- Control	DMX512, Timer, Manual, Wireless DMX
- DMX channels	2 channels
- Connection	Neutrik Powercon (Power) XLR 3-pin and 5-pin (DMX)
- Dimension	L548 W480 H254 mm (L21.57 W18.90 H10 inch)
- Weight	25.9 kg (56.98 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

EFFECTS



FUNCTION



FLUID



FLG Heavy Fog Fluid



The Ultimate Touring Atmospheric Effect

The First Fog and Haze Hybrid presented by Antari



FLG-5E Heavy Fog Fluid

Patent No. (CHINA) ZL201210471041.X ZL201220615399.0
(TAIWAN) 343449 099885 D153178 M446321

F-7 Smaze

Designed for large venue, the F-7 Smaze machine offers the all-in-one solution for your needs.

With its switchable Fog and Faze mode, the machine is capable produces strong powerful fog or thin layer of haze to fill up the venue in mins.

Equip with our latest air pump technology enabling self-cleaning feature also produce fine dry fog. The built in adjustable fan allows you to direct the fog easily.

Versatile control option includes Wireless DMX, DMX and stand alone to meet any control needs. Designed into a road case make this tour ready unit to be transport at ease.

Feature

- All in one Fog + Faze machine, switch between fog and faze effect
- Tour ready rugged design
- Built-in high velocity fan with adjustable output angle
- Self cleaning function
- Built-in Wireless DMX
- 3 channel DMX control (Fog / Faze Mode, volume, Fan volume)
- Auto sensing frequency

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 13.5A AC 220-240V, 50 / 60Hz 7A
- Rated power	1620W
- Warm-up time	8 minutes (approx.)
- Fluid consumption	Fog mode: 140 ml/min Faze mode: 28ml/min SI (1.32gal)
- Fluid tank capacity	Antari FLG-5E Heavy Fog Fluid
- Compatible fluid	Fog mode: 35 mins at max. output
- Operating time	Faze mode: 2.8 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	Fog mode: 23,000 ft ³ /min (651 m ³ /min) Faze mode: 6,000 ft ³ /min (170 m ³ /min) DMX512, Timer, Manual, Wireless DMX
- Control	3 channels
- DMX channels	Neutrik Powercon (Power)
- Connection	XLR 3-pin and 5-pin (DMX)
- Dimension	L728 W428 H719 mm (L28.66 W16.85 H28.31 inch)
- Weight	52.5 kg (115.74 lbs)

FOG EFFECTS



Full Swing



Fan at 45° position



Fan at 90° position

FAZE EFFECTS



Fan at 45° position



Fan at 90° position

FUNCTION



Multi-angle Fan
9 Positions Are Available



Digital Control Panel &
Fluid Reservoir

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



Patent No. (T.WAN) M400337 ©142035

IP-1000 IP-Rated Fog Machine

This brand new IP-1000 has been a break through from the past models that are only limited in indoor usage. 1000W fog machine featuring a sleek stainless exterior that renders this powerful fog machine impervious to both dust and water spray. This new IP-63 rated model represents both a technical and aesthetic advancement, melding an appealing fresh form and groundbreaking practical functionality in a new unit suitable for a wide range of club, installation, retail and leisure applications and beyond. Combining the solid performance for which Antari fog machines are known with leading edge enhancements, the IP-1000 spray-proof fog machine is an exciting addition to the Antari line.

Feature

- Stainless steel case makes it perfect for operating in outdoor with damp condition.
- Typical Antari quality heat exchanger generates pure and dry fog.
- To give you the flexibility of installation and maximize the duration of continuous operation, IP-1000 does not come with an attached fog fluid tank. With a 10 meter long fog fluid tube coming along with IP-1000, you can deploy your fluid tank at any place where is most convenient for you. You can also use a huge fog fluid tank (not included with the original package) to enable your expected continuous operation time.

EFFECTS



ACCESSORIES



FLUID



Specification

- Input voltage	AC 100-120V, 50 / 60Hz 8.6A AC 220-240V, 50 / 60Hz 4.3A
- Rated power	1000W
- Warm-up time	11.5 minutes (approx.)
- Fluid consumption	90 ml/min
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Ambient temp. range	0 °C - 40 °C (32 °F - 104 °F)
- Output	15,000 ft ³ /min (425 m ³ /min)
- Control	Manual
- Dimensions	1355 W249 H203 mm (113.98 W9.80 H7.99 inch)
- Weight	8.8 kg (19.40 lbs)

IPFOG IP63
IP-1000

EFFECTS



ACCESSORIES



FLUID



IP-1500 IP-Rated Fog Machine

The IP-1500 is Antari's newest waterproof fog machine, incorporating an innovative new design that earns it an IP-63 rating. Whether indoor or outside, the new IP-1500 delivers massive fog output with its state-of-the-art design and 1500 watts of power.

Included in that design is an extremely precise temperature control system, highly efficient heat conservation system.

When using the IP-1500 outdoors, even when raining, it is capable of detecting the ambient temperature and adjusting its operating parameters accordingly. Of course, both DMX and wireless remote options also come standard with this professional machine.

The new IP-1500 was designed with efficiency in mind and achieves 13% less electricity consumption than other foggers in its size class, making it the greenest choice.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 13A AC 220-240V, 50 / 60Hz 6.5A
- Rated power	1500W
- Warm-up time	9 minutes (approx.)
- Fluid consumption	100 ml/min
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Ambient temp. range	0 °C - 40 °C (32 °F - 104 °F)
- Output	20,000 ft ³ /min (566 m ³ /min)
- Control	DMX12, Timer, Manual, Wireless
- DMX channels	1 channel
- Connection	XL8 5-pin (DMX)
- Dimension	1465 W222 H250 mm (118.31 W8.74 H9.84 inch)
- Weight	13.5 kg (29.76 lbs)



Patent No. (T.WAN) M400337 ©142035

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

M-4

STAGE FOGGER

M-4 Stage Fogger

The mechanical design of M-4 is simply perfect for transporting as the fluid tank is kept in the separate compartment inside the machine.

Built-in wireless DMX make it complete wire free to save the hassle of cables. With the update auto sensing frequency enables the machine to automatically adjust its frequency to give best performance.

Feature

- Optional W-DMX or Wireless Remote available
- New structure design for multiple angle rigging
- Auto sensing frequency
- Fluid tank compartment for ease of transportation
- Solid sturdy structure of machine body convenient for transportation
- Huge output volume
- Great fit for any renting purposes
- Generate fog at any orientation

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 12.5A AC 220-240V, 50 / 60Hz 6.3A
- Rated power	1450W
- Warm-up time	5 minutes (approx.)
- Fluid consumption	120 ml/min
- Fluid tank capacity	2.4l (0.63gal)
- Compatible fluid	Antari FLC Super Light Fog Fluid
- Operating time	20 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	6 meters height
- Control	DMXS12, Timer, Manual, Wireless (Optional)
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power)
- Optional accessories	XLR 3-pin and 5-pin (DMX) W-DMX-PCBR Wireless DMX WTR-30 Wireless Remote WTR-100 Wireless DMX
- Dimension	1344 W193 H381 mm (L13.54 W7.60 H15 inch)
- Weight	11 kg (24.25 lbs)



Patent No. (CHINA) ZL201210471041.8 ZL20120015299.0
(TAINAN) NA48821 NA2000



RIGGING



Threads at the Bottom Allow Machine to be in Different Positions. Clamps are not included

ACCESSORIES



FLUID



FLC Super Light Fog Fluid

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it



M-7 RGB Stage Fogger



The new M-7 RGB is the updated version of the original M-7 LED fog machine. Amber LEDs have been added up to M-7 RGB which allows its color mixing even more attractive. Plus, optional W-DMX function is available on M-7 RGB.


Feature

- RGB LEDs on board.
- Optional Wireless DMX available.
- New structure design for multiple angle rigging
- Auto sensing frequency
- Fluid tank compartment for ease of transportation
- Huge output volume with high pigments LED colors
- Great fit for Stage purpose
- Generate fog at any orientation

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 13A AC 220-240V, 50 / 60Hz 6.5A
- Rated power	1516W
- Light source	22 x 3W LED (3 Red, 6 Green, 6 Blue, 5 Amber)
- Warm-up time	5 minutes (approx.)
- Fluid consumption	120 ml/min
- Fluid tank capacity	2.4l (0.63gal)
- Compatible fluid	Antari FLC Super Light Fog Fluid
- Operating time	20 mins at max. output
- Ambient temp. range	0°C - 40 °C (32 °F-104 °F)
- Output	6 meters height
- Control	DMX12, Timer, Manual, Wireless, Master/Slave Wireless DMX (Optional)
- DMX channels	9 channels
- Connection	Neutrik Powercon (Power) XLR 3-pin and 5-pin (DMX)
- Optional accessories	WTR-90 Wireless DMX
- Dimension	L344 W193 H381 mm (L13.54 W7.60 H15 inch)
- Weight	11.5 kg (25.35 lbs)

EFFECTS 360° Generate fog at any orientation

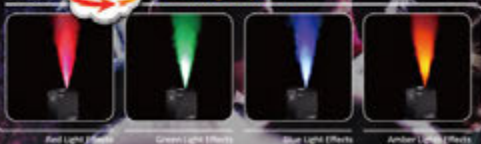

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

RIGGING



ACCESSORIES



FLUID



ORDER NO. (ITALY) 12012206151990
ORDER NO. (USA) 12012206151990

M-8
MIST FOGGER



Patent No. (TAIWAN) 363469 099885 D155178

M-8 Stage Fog Machine

M-8 is the new member of Antari M Series. It is also the first 1700 Watt fog machine from Antari.

Besides the heritage of tough structure and built-in DMX from Antari M-Series, the most marvelous feature is the speedy and massive fog output provided by the high pressure heat exchanger, which can satisfy rigorous demands of professional stage and touring use.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 14.2A AC 220-240V, 50 / 60Hz 7.4A 1700W
- Rated power	1700W
- Warm-up time	9.5 minutes (approx.)
- Fluid consumption	240 ml/min
- Fluid tank capacity	10l (2.64gal)
- Compatible fluid	Antari FLG-10 Heavy Fog Fluid Antari FLR-10 Light Fog Fluid
- Operating time	40 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F - 104 °F)
- Output	50,000 ft ³ /min (1416 m ³ /min)
- Control	DMX512, Timer, Manual Wireless (Optional)
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 3-pin and 5-pin (DMX)
- Optional accessories	M-31 Wireless Control Module FX-5 Flightcase M-5-HB Hanging Bracket
- Dimension	L690 W320 H298 mm (L27.17 W12.60 H11.73 inch)
- Weight	22 kg (48.50 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



ACCESSORIES



M-21 Control Module



M-31 Wireless
Control Module



FX-5 Flightcase



M-5-HB
Hanging Bracket

FLUID



FLR-10 Light Fog Fluid
FLG-10 Heavy Fog Fluid

M-5
STAGE FOGGER**M-10**
STAGE FOGGER

Patent No. (TAIWAN) 363449 099885 D155178

FLR-10 Light Fog Fluid
FLG-10 Heavy Fog Fluid

M-5 & M-10 Stage Fog Machine

This high performance heavy-duty M-5 & M-10 Stage Fog Machine from Antari are uniquely designed to meet the rigorous demands of stage and touring use: a high-capacity 10 liter tank offers long time operation. A rectangular, durable sleek housing design makes the Antari M-Series Stage Fog Machine easy to carry and be able to stand with tough road transport (Anti-shock) where custom flightcases can be optional for your application. Due to its enhanced heat reservation structure, it reduces electricity consumption for about 20 ~ 25% yet producing more powerful fog.

They will stand the rigors of professional use as well as protection against unexpected water spills and changing weather conditions. There are 2 professional choices M-5 (1500W) and M-10 (3000W). They have DMX on-board and can be controlled remotely with a digital M-20 LCD display module, enabling convenient remote operation. DMX connection can be worked by either 3 or 5 pin connector. The Antari M-Series Stage Fogger are ideal for large concerts, movie production, fire training purpose and especially for touring applications, as well as any venue where ultimate performance, ease of use and dependability are specified. It is the most powerful single heater-block fog machine available on the market.

M-5 Specification

- Input voltage	AC 100-120V, 50 / 60Hz 12.5A AC 220-240V, 50 / 60Hz 6.6A
- Rated power	1500W
- Warm-up time	8 minutes (approx.)
- Fluid consumption	160 ml/min
- Fluid tank capacity	10l (2.64gal)
- Compatible fluid	Antari FLG-10 Heavy Fog Fluid Antari FLR-10 Light Fog Fluid
- Operating time	60 mins at max. output
- Ambient temp. range	0°C - 40 °C (32°F-104 °F)
- Output	25,000 ft ³ /min (708 m ³ /min)
- Control	DMX512, Timer, Manual, Wireless (Optional)
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 3-pin and 5-pin (DMX)
- Optional accessories	M-30 Pro Wireless Control Module FX-5 Flightcase M-5-HB Hanging Bracket
- Dimension	L668 W320 H276 mm (L26.30 W12.60 H10.87 inch)
- Weight	15.5 kg (34.17 lbs)


M-10 Specification

- Input voltage	AC 220-240V, 50 / 60Hz 13A
- Rated power	3000W
- Warm-up time	9.5 minutes (approx.)
- Fluid consumption	250 ml/min
- Fluid tank capacity	10l (2.64gal)
- Compatible fluid	Antari FLG-10 Heavy Fog Fluid Antari FLR-10 Light Fog Fluid
- Operating time	40 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	50,000 ft ³ /min (1416 m ³ /min)
- Control	DMX512, Timer, Manual, Wireless (Optional)
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 3-pin and 5-pin (DMX)
- Optional accessories	M-30 Pro Wireless Control Module FX-5 Flightcase
- Dimension	L690 W320 H298 mm (L27.17 W12.60 H11.73 inch)
- Weight	21 kg (46.30 lbs)

M-5 ACCESSORIES



M-10 ACCESSORIES

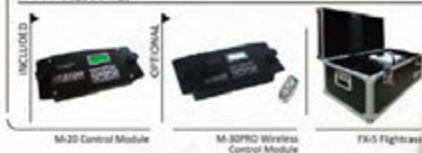

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



Not just wireless but Mobile.



WIFI-800 Fog Machine Controlled by Smartphone

This is world's 1st SmartPhone controlled fog machine : Antari WiFi800.

Now, besides making phone calls, checking your social media, playing games, you can also use your SmartPhone to control Antari WiFi800 fogger.

Add this cool function to your stylish Antari 800 Watt fogger today!



EFFECTS



ACCESSORIES



FLUID



Specification

- Input voltage	AC 100-120V, 50 / 60Hz 6.7A AC 220-240V, 50 / 60Hz 3.5A
- Rated power	800W
- Warm-up time	2 minutes (approx.)
- Fluid consumption	13 ml/min
- Fluid tank capacity	0.8l (0.21gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	60 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	3,000 ft ³ /min (85 m ³ /min)
- Control	iOS, Android, Timer, Manual, Wireless (Optional)
- Optional accessories	Z-10 Cable Remote Z-40 Cable Timer Remote Z-50 Wireless Remote
- Dimension	L315 W128 H218 mm (L12.40 W5.04 H8.58 inch)
- Weight	4.1 kg (9.04 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



**Redefine Fog Jet Effect,
Feel the Power**



**Distributed by:
AMLUX s.r.l.**

**46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it**

W-715 Fog Jet

Antari W-715 fog machine provides powerful fog plume effect.

The new heating system provides a remarkable output of 20 seconds burst, increase in heat preservation to reduce re-heat time. Newly designed fluid piping system removes the remaining fluid to provide clear burst without excess fog.

FLC water based fluid is specially designed for the job, makes the effect more perfect and precise with a fast-dissipating formula.

2 Second Jet Mode enables quick effect at a touch of button, with advanced LCD control panel, W-1 wireless control system and DMX 512 onboard provides versatile and flexible ways of control.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 13.6A AC 220-240V, 50 / 60Hz 6.8A
- Rated power	1600W
- Warm-up time	7.5 minutes (approx.)
- Fluid consumption	300 ml/min
- Fluid tank capacity	2.4l (0.63gal)
- Compatible fluid	Antari FLC Super Light Fog Fluid
- Operating time	8 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	8 meters height
- Control	DMX512, Timer, Manual, Wireless
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power)
- Optional accessories	FX-4 Flightcase
- Dimension	L448 W295 H210 mm (L17.64 W11.61 H8.27 inch)
- Weight	15.5 kg (34.17 lbs)

EFFECTS



Vertical Output



Horizontal Output



Synchronized Output
Effect by DMX

ACCESSORIES



W-1 Wireless Transmitter



FX-4 Flightcase

FLUID



FLC Super Light Fog Fluid

Wintop

Easy. Simple. In control.
Made to be free.



FLR Light Fog Fluid
FLG Heavy Fog Fluid



W-515D Wireless Transmitter
W-530D Wireless Receiver



W-515D Hanging Bracket



W-515D Carrying Case

Patent No. (CHINA) ZL201220047204.1 X ZL2012200665399.0
(TAIWAN) 96668322

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

W-515D & W-530D Wireless Control Fog Machine

The cutting-edge wireless control system gives Antari W series a simple setting and operation interface. Additionally, the state-of-the-art heater design upgrades the W Series fog machines to a higher level in terms of good quality fog and energy efficiency. In conclusion, Antari W Series bring users to a professional scene in an easier method.

Features

- **Intelligent Wireless Control System**
Each machine comes with a set of wireless receiver and transmitter as standard controller. The working distance of wireless control is 50 meters in open area.
- **Opto-electronic Fluid Sensor**
When the fluid recipient runs dry, the fluid sensor stops pumping automatically to protect pump from burning.
- **More Efficient New Heat Exchanger Design**
It can generate drier fog with smaller particles. This leads to a fairly low fog fluid consumption. Compare to the equivalent power consumption heat exchangers, the same quantity of fog fluid in W series can produce 20% more fog than others.
- **New Advanced PCB (Printed Circuit Board)**
Design The new system can control temperature precisely and rule out the influence from outside environments as much as possible to make W series fog machines be able to work stably between - 20 and + 60 degree Celsius.

EFFECTS & FUNCTION



W-515D Specification

- Input voltage	AC 100-120V, 50 / 60Hz 12.5A AC 220-240V, 50 / 60Hz 6.3A
- Rated power	1450W
- Warm-up time	10 minutes (approx.)
- Fluid consumption	100 ml/min
- Fluid tank capacity	6l (1.59gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	60 mins at max. output
- Ambient temp. range	0°C - 40 °C (32°F-104 °F)
- Output	20,000 ft ³ /min (566 m ³ /min)
- Control	DMX512, Timer, Manual, Wireless, Wireless DMX
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power)
- Optional accessories	XL8 3-pin and 5-pin (DMX) FX-5 Flightcase W-515-HB Hanging Bracket L561 W278 H265 mm (L22.09 W10.94 H10.43 inch)
- Dimension	
- Weight	14.5 kg (31.97 lbs)

W-530D Specification

- Input voltage	AC 220-240V, 50 / 60Hz 11A
- Rated power	2500W
- Warm-up time	12 minutes (approx.)
- Fluid consumption	160 ml/min
- Fluid tank capacity	6l (1.59gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	30 mins at max. output
- Ambient temp. range	0°C - 40 °C (32 °F-104 °F)
- Output	40,000 ft ³ /min (1133 m ³ /min)
- Control	DMX512, Timer, Manual, Wireless, Wireless DMX
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power)
- Optional accessories	XL8 3-pin and 5-pin (DMX) FX-5 Flightcase W-515-HB Hanging Bracket L581 W278 H265 mm (L22.87 W10.94 H10.43 inch)
- Dimension	
- Weight	19.1 kg (42.11 lbs)

Winger

Easy. Simple. In control.
Made to be free.



FLG-6 Light Fog Fluid
FLG-6 Heavy Fog Fluid



W-510 Wireless Transmitter



W-510 HB for W-508

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

W-508 & W-510

Wireless Control Fog Machine

The cutting-edge wireless control system gives Antari W series a simple setting and operation interface. Additionally, the state-of-the-art heater design upgrades the W Series fog machines to a higher level in terms of good quality fog and energy efficiency. In conclusion, Antari W Series bring users to a professional scene in an easier method.

Features

- **Intelligent Wireless Control System**
Each machine comes with a set of wireless receiver and transmitter as standard controller. The working distance of wireless control is 50 meters in open area.
- **Opto-electronic Fluid Sensor**
When the fluid recipient runs dry, the fluid sensor stops pumping automatically to protect pump from burning.
- **More Efficient New Heat Exchanger Design**
It can generate drier fog with smaller particles. This leads to a fairly low fog fluid consumption. Compare to the equivalent power consumption heat exchangers, the same quantity of fog fluid in W series can produce 20% more fog than others.
- **New Advanced PCB (Printed Circuit Board)**
Design The new system can control temperature precisely and rule out the influence from outside environments as much as possible to make W series fog machines be able to work stably between -20 and +60 degree Celsius.

EFFECTS & FUNCTION



W-508 Effect

W-508 Rear Panel

W-510 Effect

W-510 Rear Panel

W-508 Specification

- Input voltage	AC 100-120V, 50 / 60Hz 6.7A AC 220-240V, 50 / 60Hz 3.5A
- Rated power	800W
- Warm-up time	2 minutes (approx.)
- Fluid consumption	13 ml/min
- Fluid tank capacity	0.8l (0.21gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	60 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	3,000 ft ³ /min (85 m ³ /min)
- Control	Manual, Wireless
- Dimension	L315 W128 H218 mm (L12.40 W5.04 H8.58 inch)
- Weight	3.8 kg (8.38 lbs)

W-510 Specification

- Input voltage	AC100-120V, 50 / 60Hz 8.5A AC 220-240V, 50 / 60Hz 4.25A
- Rated power	1000W
- Warm-up time	13 minutes (approx.)
- Fluid consumption	90 ml/min
- Fluid tank capacity	2.8l (0.74gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	30 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	15,000 ft ³ /min (425 m ³ /min)
- Control	DMX512, Wireless
- DMX channels	1 channel
- Connection	XLR 3-pin (DMX)
- Optional accessories	W-510-HB Hanging Bracket
- Dimension	L487 W250 H223 mm (L19.17 W9.84 H8.78 inch)
- Weight	11.4 kg (25.13 lbs)

W-101 Bubble



W-101 Wireless Control Bubble Machine

The cutting-edge wireless control system gives Antari W-101 bubble machine a simple setting and operation interface. It brings users to a professional scene in an easier method.

Features

- **Intelligent Wireless Control System**
Each W-101 bubble machine comes with a set of wireless receiver and transmitter as standard controller. The working distance of wireless control is 50 meters in open area.
- **Texture-like Painting Finish**
Though most of the time, bubble machines are served as supportive character at the corner of stage, W-101 bubble machine is now given extraordinary elegant finish as a star!

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 0.25A AC 220-240V, 50 / 60Hz 0.13A
- Rated power	30W
- Fluid consumption	8.3 ml/min
- Fluid tank capacity	0.7l (0.18gal)
- Compatible fluid	Antari BL Bubble Fluid
- Operating time	1.4 hrs at max. output
- Ambient temp. range	5 °C - 40 °C (41°F-104 °F)
- Control	Manual, Wireless
- Dimension	L350 W170 H217 mm (L13.78 W6.69 H8.54 inch)
- Weight	4.8 kg (10.58 lbs)

EFFECTS & FUNCTION



Effect



Rear Panel

ACCESSORIES



W-1 Wireless Transmitter

FLUID



BL Bubble Fluid

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

Z1520 Series

Ideal for
RGB



Z-1520 RGB Two-Way Fog Machine

Want to add colors to your fog effects?

Not a problem! Let Antari Z-1520 RGB fulfill your dreams. With additional 22 RGB bright LED to shine the fog output produced by Antari Z-1520, the evolutionary successor of well-known Z-1020.

One machine can satisfy desires for both spectacular fog and lighting effects at the same time.

EFFECTS



Horizontal Output



22 x 3W LED (R, G, B)

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 13A AC 220-240V, 50 / 60Hz 6.5A
- Rated power	1516W
- Light source	22 x 3W LED (R, G, B)
- Warm-up time	5 minutes (approx.)
- Fluid consumption	150 ml/min
- Fluid tank capacity	2.4l (0.63gal)
- Compatible fluid	Antari FLC Super Light Fog Fluid
- Operating time	16 mins at max. output
- Ambient temp. range	0°C - 40 °C (32 °F-104 °F)
- Output	6 meters height
- Control	DMX12, Timer, Manual, Master/Slave, Wireless
- DMX channels	8 channels
- Connection	Neutrik Powercon (Power)
- Optional accessories	XLR 3-pin and 5-pin (DMX) FX-4 Flightcase
- Dimension	L418 W295 H210 mm (L16.46 W11.61 H8.27 inch)
- Weight	10.4 kg (22.93 lbs)

ACCESSORIES



W-2 Wireless Transmitter



FX-4 Flightcase

FLUID



FLC Super Light Fog Fluid

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

Z4 Series

HIGH PERFORMANCE HAZE .
SURPRISINGLY SMART



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

Z-350 Fazer

The Z-350 is the latest creation from Antari stemming from years of experience in Fazer development.

The adoption of the air pump technology not only enables the Z-350 to generate dry haze but also provides its heater with a self-cleaning function. The Z-350 comes with a larger tube, which substantially reduces the risk of heater clogging.

An extremely low fluid consumption rate grants a full tank (1.3 liters) of the Z-350 to produce more than 7 hours of non-stop hazing at maximum output.

The new DMX feature offer user intelligent control on Z-350 in an energy saving way. When a DMX signal is received, the machine powers up and starts heating up automatically. When the DMX signal is off, it automatically begins the self-cleaning process and then goes into "Sleep" mode.

The machine weighs only 8.5 kg. Being so light and compact allows the Z-350 to be transported and setup anywhere - whenever needed.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 6.3A AC 220-240V, 50 / 60Hz 3.15A
- Rated power	730W
- Warm-up time	4.5 minutes (approx.)
- Fluid consumption	3 ml/min
- Fluid tank capacity	1.3l (0.34gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid
- Operating time	7 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	3000 ft ³ /min (85 m ³ /min)
- Control	DMX512, Manual,
- DMX channels	2 channels
- Connection	IEC (Power)
- Optional accessories	XLR 3-pin (DMX) Z-3 Cable Remote FX-4 Flightcase
- Dimension	L320 W153 H391 mm (L12.60 W6.02 H15.39 inch)
- Weight	8.5 kg (18.74 lbs)

EFFECTS & FUNCTION



Effect



Rear Panel

ACCESSORIES



Z-3 Cable Remote



FX-4 Flightcase

FLUID



FLG Heavy Fog Fluid

Patent: Amlux (USA)
0000 311
002187610-0001
0000 311
0000 311
0000 311
0000 311

Z Series



Z-380 Fazer

After a hectic day of work, you just want to get together with friends for a drink. Imagining the romantic feel created by gentle lighting shoot through the fog that relax you in total...

For the past 30 years, Antari fog machines have been presented in numberless international large scale events, and satisfied most of the high standard professional user's demands in machine stability and effects.

Now, the new challenge to meet the new trend of fog machine for commercial purpose, Antari has developed a new Z-380 model. The design of this new fog machine based on previous models for professional users, but practically in a broader application for general commercial purposes.

Features

- Compact and powerful
- 3 and 5 pin DMX connector
- DMX offline auto power off
- User friendly LCD control panel
- Hanging bracket for ease of installation
- Large tube and auto cleaning function extend lifespan of heater unit
- Linear fan volume adjustment
- 0-10V control

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 8.5A AC 220-240V, 50 / 60Hz 6.5A
- Rated power	1000W (120V) 1500W (240V)
- Warm-up time	1.5 minutes (approx.)
- Fluid consumption	6 ml/min
- Fluid tank capacity	1.2l (0.32gal)
- Compatible fluid	Antari FLG-1E Heavy Fog Fluid
- Operating time	3 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	6000 ft ³ /min (170 m ³ /min)
- Control	DMX512, Manual, Timer Wireless (Optional)
- DMX channels	2 channels
- Connection	IEC (Power)
- Optional accessories	XLR 3-pin and 5-pin (DMX) Z-3 Cable Remote WTR-20 Wireless Remote
- Dimension	L328 W248 H265 mm (L12.91 W9.76 H10.43 inch)
- Weight	8.3 kg (18.30 lbs)

EFFECTS & FUNCTION



Effect

Rear Panel

ACCESSORIES



W-2 Transmitter x 1
W-2 Receiver x 1

Z-3 Cable Remote

FLUID



FLG-1E Heavy Fog Fluid

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

Z Series



Z-800II Mobility and Portability Fog Machine

Z-800II, a cutting-edge technology designed by Antari is aimed to meet the demands of mobility and portability. An ideal machine for easy operation that is perfect for smaller venues and DJs.

The Z-800II, whether controlled via wireless, timer or in stand-alone mode, features rock-steady continuous output. Z-800II can undertake a fast warm-up time less than 120 seconds and produces a steady, constant fog as long as you need without any reheating time in between.

This machine encompasses all technical aspects with per excellence performance and workmanship design. With its high efficient power control system, it now allows the fogger to operate at low-level temperature resulting in 20% less electricity than its previous model.

Z-800II sets the standard in mobility/portability fog machine range presented by Antari. Apparently a user-friendly device and a remarkable fog machine perfect for clubs, discotheques and small venues.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 6.7A AC 220-240V, 50 / 60Hz 3.5A
- Rated power	800W
- Warm-up time	2 minutes (approx.)
- Fluid consumption	13 ml/min
- Fluid tank capacity	0.8l (0.21gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	60 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	3,000 ft ³ /min (85 m ³ /min)
- Control	Manual Timer (Optional) Wireless (Optional)
- Optional accessories	Z-40 Cable Timer Remote Z-50 Wireless Remote
- Dimension	L315 W128 H218 mm (L12.40 W5.04 H8.58 inch)
- Weight	3.5 kg (7.72 lbs)

EFFECTS & FUNCTION



ACCESSORIES



FLUID



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

Z-Series



Patent No. [CHINA] ZL200530064257.2

Z-1020 Two-Way Fog Machine

Z-1020, the most powerful DMX-controlled vertical pure fog machine which stands differently from the other Z-Series. Its design is for special purposes and applications which you can't find in any fog machines available. It uses mirror-piping heater technology that supports advance features and high-throughout burst mode with its extreme low energy consumption.


The Z-1020 can be positioned on the ground to fog upward to have a column of fog effect or can be mounted on the wall to easily blend the surroundings with atmospheric effect. Or else can be used to fog in upright position. Other features include DMX on-board, built-in electronic low fluid detector. Light weight, sleek and compact design, easy installation and maintenance.

Z-1020 is perfect for theatrical and studio application, large halls, concerts, DJ touring and clubs.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 9A AC 220-240V, 50 / 60Hz 4.5A
- Rated power	1000W
- Warm-up time	13 minutes (approx.)
- Fluid consumption	90 ml/min
- Fluid tank capacity	2.4l (0.63gal)
- Compatible fluid	Antari FLC Super Light Fog Fluid Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	25 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	5 meters height
- Control	DMXS12, Manual Wireless (Optional) Timer (Optional)
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Optional accessories	Z-40 Cable Timer Remote Z-50 Wireless Remote FX-4 Flightcase
- Dimension	L408 W295 H199 mm (L16.06 W11.61 H7.83 inch)
- Weight	9.8 kg (21.61 lbs)

EFFECTS & FUNCTION



ACCESSORIES



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

Z-Series



FLR Light Fog Fluid
FLR Heavy Fog Fluid

Patent No. (CHINA) ZL2012106176.98.8 (TAIWAN) 476300
 (Z-1000II) ZL200910096200.0
 (Z-1200II) ZL200910062668.7



Z-1000II & Z-1200II Fog Machine

Z-1000II and Z-1200II dominate the entry-level of Z-Series II Fog Machine for high performance output necessary to scale up the machines' efficiency. It is equipped with ECO thermal control system and patented UNICORE heater technology where the heater core can be easily draw-out from the heater block ensuring quick and easy cleaning. The heater element is like a jet air stream that can deliver a powerful fog in order to create the very best atmospheric effect. (perfect for mid-air fog as well) In addition, it is armed with on-board DMX to work with club lighting directors, installers, planners as well as DJ's who need more fog and control.

Z-1000II and Z-1200II come with high-quality pump and electronic low-fluid detector also known as Thermal Cut-Off (TCO), which automatically reactivates and shuts down the pump power when the fluid level is low and depleted. Other feature includes standard hanging bracket to facilitate in any installations or on the road from venue to venue.

Z-1000II Specification

- Input voltage	AC100-120V, 50 / 60Hz 9A AC 220-240V, 50 / 60Hz 4.5A
- Rated power	1000W
- Warm-up time	6 minutes (approx.)
- Fluid consumption	72 ml/min
- Fluid tank capacity	1.7l (0.45gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	23 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	12,000 ft ³ /min (340 m ³ /min)
- Control	DMX512, Manual Timer (Optional) Wireless (Optional)
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Optional accessories	Z-40 Cable Timer Remote Z-50 Wireless Remote
- Dimension	L433 W198 H214 mm (L17.05 W7.80 H8.43 inch)
- Weight	6.6 kg (14.55 lbs)

Z-1200II Specification

- Input voltage	AC100-120V, 50 / 60Hz 10.5A AC 220-240V, 50 / 60Hz 5.5A
- Rated power	1200W
- Warm-up time	10 minutes (approx.)
- Fluid consumption	90 ml/min
- Fluid tank capacity	2.5l (0.66gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	27 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	18,000 ft ³ /min (510 m ³ /min)
- Control	DMX512, Manual, Timer Wireless (Optional)
- DMX channels	1 channel
- Connection	XLR 3-pin (DMX)
- Optional accessories	Z-9 Wireless Remote
- Dimension	L458 W243 H251 mm (L18.03 W9.57 H9.88 inch)
- Weight	10.9 kg (24.03 lbs)

Z-1000II EFFECTS & ACCESSORIES



Z-1200II EFFECTS & ACCESSORIES



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

Z Series



FLR-6 Light Fog Fluid
FLG-6 Heavy Fog Fluid

Patent No. [CHINA] (Z-1500II) ZL200510064244.1

Z-1500II & Z-3000II Fog Machine

Antari proposes to you the Z-1500II & Z-3000II, the rigorous research and development resulting stability, durability, and reliability. When it comes to ultimate performance and precision control, the Z-1500II & Z-3000II will suit virtually any applications. These fog machine provide significant advantages in a wide array of applications where volume of fog output is critical. Around 25% electricity is saved due to high efficient power control system allowing the fogger to operate at low-level temperature.

An electronic low fluid detector is also installed which automatically weakens pump power and stops pumping when running-out of fluid. They are fully controllable via Z-20 LCD control module supplied allowing the operator to set the volume control and timing precisely to the exact percentage from 1% to 100% output. DMX connection can be worked by either 3 or 5 pin connector. These machines are Antari's proud innovation; they are dedicated to most demanding professionals. Ideal for very large venues, outdoor event, movie production or for fire training concept.

Z-1500II Specification

- Input voltage	AC100-120V, 50 / 60Hz 12.5A AC 220-240V, 50 / 60Hz 6.3A
- Rated power	1450W
- Warm-up time	10 minutes (approx.)
- Fluid consumption	110 ml/min
- Fluid tank capacity	6l (1.59gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	54 mins at max. output
- Ambient temp. range	0°C - 40 °C (32 °F-104 °F)
- Output	20,000 ft ³ /min (566 m ³ /min)
- Control	DMX512, Manual, Timer Wireless (Optional)
- DMX channels	1 channel
- Connection	XLR 3-pin and 5-pin (DMX)
- Optional accessories	Z-30 Pro Wireless Remote
- Dimension	1688 W285 H257 mm (L27.09 W11.22 H10.12 inch)
- Weight	14 kg (30.86 lbs)

Z-3000II Specification


- Input voltage	AC 220-240V, 50 / 60Hz 11A
- Rated power	2500W
- Warm-up time	12 minutes (approx.)
- Fluid consumption	200 ml/min
- Fluid tank capacity	6l (1.59gal)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid
- Operating time	30 mins at max. output
- Ambient temp. range	0°C - 40 °C (32 °F-104 °F)
- Output	40,000 ft ³ /min (1133 m ³ /min)
- Control	DMX512, Manual, Timer Wireless (Optional)
- DMX channels	1 channel
- Connection	XLR 3-pin and 5-pin (DMX)
- Optional accessories	Z-30 Pro Wireless Remote
- Dimension	1735 W310 H269 mm (L28.94 W12.20 H10.59 inch)
- Weight	19.9 kg (43.87 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

Z-1500II EFFECTS & ACCESSORIES

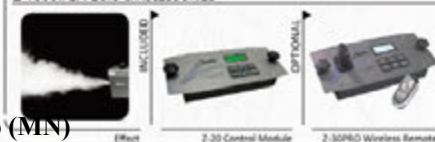

Z-3000II EFFECTS & ACCESSORIES



LOW FOG GENERATOR



ICE-101 ICE Fog Machine

ICE-101 ice fog machine, as its name suggests, produces beautiful floor-hugging dry ice fog effect by simply adding regular ice cubes. Without the inconvenience of dry ice or the potential health hazards caused by dry ice's heavy CO₂ smoke, this ICE Fog machine is expected to be Eco-friendly.

A high power 1130W fog machine inside creates amounts of fog which is chilled to create a low lying ground hugging fog effect.

10kg of ice cubes placed in the ice chamber can be stored up to 8 hours and enable 1 hour of continuous operation. Full DMX on-board means 100% control and the drainage pump can be activated manually or set to automatic for optimum convenience.

You will never want to go back to dry ice machine again because this unit is very easy and safe to operate as it is the most convenient way to create ankle-deep fog for many applications.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 9.5A AC 220-240V, 50 / 60Hz 5A
- Rated power	1130W
- Warm-up time	4.5 minutes (approx.)
- Fluid consumption	25ml/min
- Fluid tank capacity	2.5l (0.66gal)
- Compatible fluid	Antari FLR Light Fog Fluid Antari FLC Super Light Fog Fluid
- Operating time	1.5 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	43 m ³ /min
- Control	DMX512, Timer, Manual
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Dimension	L660 W355 H443 mm (L25.98 W13.98 H17.44 inch)
- Weight	24.4 kg (53.79 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

EFFECTS & FUNCTION



ACCESSORIES



FLUID



LOW FOG GENERATOR



DNG-100 Fog Cooler

The DNG-100 converts normal fog from fog machine into a floor-hugging cloud which is almost virtually similar to the dry ice effect. This is achieved by cooling the temperature of the fog to the point where it falls to the ground.

The DNG-100 is easy to operate as there are no external controls on the machine. Simply plug the unit in and place the fog conducting hose from the output of any fog machine to the input of the DNG-100.

The unit is fully operational upon being plugged in. Note that the volume of fog produced is controlled by the fog machine that the DNG-100 is attached to.

Specification

• Input voltage	AC 100-120V, 50 / 60Hz 6.6A ~ 14.9A AC 220-240V, 50 / 60Hz 2.4A ~ 5.9A
• Refrigerant	120V R- 404A, 1.39LB (0.63Kg) 240V R- 404A, 1.39LB (0.63Kg)
• Start current	120V / 63A 240V / 21A
• Ambient temp. range	5 °C - 40 °C (41 °F-104 °F)
• Control	On / Off switch control
• Optional accessories	FTA-1 FTA-2A FTA-3
• Dimension	L 784 W 608 H 479 mm
• Weight	72 Kg

Two implementations of the DNG-100 :



A fog conducting hose (FT-10) is attached to a fog machine's output nozzle via an adaptor (FTA-1/2A/3) and then connected to the FTA-10 adaptor attached to the DNG-100's intake. The fog flows efficiently from the fog machine through the DNG-100, and is directed downwards by the guide plate (FTA-12).



For remote placement of low-lying fog, substitute the guide plate with a fog conducting hose that attaches to the front of the DNG-100 via an adaptor (FTA-11). This configuration allows the DNG-100's output to be guided to a desired area without being affected by air currents generated by movement, wind, fans or air conditioners.

Refer to accessory page for details

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

DNG-200 LOW FOG GENERATOR



DNG-200 Low Fog Generator

The DNG-200 Low Fog Generator is the complete ground fog effect solution. It's a fully self-contained unit that has a built-in fog machine and cooling system to create low lying fog effect, makes it far more efficient and convenient comparing to CO₂ and dry ice.

Built-in volume, timer and DMX function setting are fully accessible through its LCD display control interface. The unit comes with a 3 meters conducting hose enable user to guide the fog to desire location. Its robust built structure comes with large side handles and wheels for the ease of transportation. DNG-200 is designed to meet requirement for medium to large scale venues.

Features

- Self-contained unit, no CO₂ or dry ice.
- Continuous low fog output
- High efficiency heat exchange system generates massive output
- Optional flightcase offers extra protection and ease of transportation

Specification

• Input voltage	AC 100-120V, 50 / 60Hz 6.6 ~ 14.9A AC 220-240V, 50 / 60Hz 2.4 ~ 5.9A
• Refrigerant	R- 404A, 1.98LB (0.9Kg) R- 404A, 1.98LB (0.9Kg)
• Start current	120V / 63A 240V / 21A
• Rated power	120V / 1400W 240V / 2500W
• Warm-up time	120V / 24 minutes (approx.) 240V / 12 minutes (approx.)
• Fluid consumption	100 ml / min (100% output)
• Fluid tank capacity	10 Liters
• Compatible fluid	Antari FLR-10 Light Fog Fluid Antari FLC-10 Super Light Fog Fluid
• Operating Time	1.5 hr at max. output
• Ambient temp. range	5 °C - 40 °C (41 °F-104 °F)
• Output	80 m ³ / min
• Control	Volume and Timer Mode DMX 512
• DMX channels	1 Channel
• Optional accessories	FDNG-200 Flightcase
• Dimension	L 780 W 608 H 715 mm
• Weight	120 Kg

EFFECTS



ACCESSORIES



FLUID



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

Mobile FOGGER



- M-1 Fog Machine
- Case
- Rechargeable Battery
- Charger
- Bottle of Fog Fluid
- Battery M-1 Fog Fluid

M-1 Mobile Fog Machine

The M-1 Mobile Fog Machine is specially designed for applications on site where mobility is crucial. Utilization of M-1 is commonly seen in photograph shooting, film making, theatrical and industrial testing locations. For its compact size and light weight (1.8 kg), this mobile fogger can be discretely placed on props, inside sets, or hand held.

As implied by its name, the mobile fogger's main characteristic is its mobility. The unit operates on a compact 12V DC rechargeable battery and is very easy to carry and operate without any warm-up time.

The M-1 can also operate with corded dummy battery. To increase the machine's versatility, timer and wireless remotes are available as optional.

Specification

- Input voltage	DC 12V (Battery) AC 100-240V, 50-60Hz (Battery charger)
- Rated power	75W
- Warm-up time	1 second (approx.)
- Fluid consumption	2 ml/min
- Fluid tank capacity	110ml (0.03gal)
- Compatible fluid	Antari FLM Fog Fluid
- Operating time	12 mins at max. output with battery
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Control	Manual Timer (Optional) Wireless (Optional)
- Optional accessories	DCP-12 Power Adaptor and Dummy Battery MCT-1 Cable Timer Remote MCR-1 Wireless Remote
- Dimension	L227 W66 H112 mm (L8.94 W2.60 H4.41 inch)
- Weight	1.8 kg (3.97 lbs)

EFFECTS



ACCESSORIES



FLUID



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

HZ-100



HZ-100 Haze Machine

This durable, compact size HZ-100 lends itself to stage, concert and filming application, where ease of operation is desired.

The HZ-100 equipped with an efficient, maintenance-free air compressor, no warm-up time required. Simply switch on the power, beautiful translucent haze will fill up the space in no time. Through its haze transfer mechanism, haze are broken down into nano particle reflect the lights to create bright and colorful light beams.

With optional timer remote and wireless remote, gives user more flexibility when controlling the HZ-100.

Specification

- Input voltage	AC 100-120V, 50/60Hz 1.5A AC 220-240V, 50/60Hz 0.8A
- Rated power	180W
- Fluid consumption	0.7 ml/min
- Fluid tank capacity	2.5l (0.66gal)
- Compatible fluid	Antari HZL Haze Fluid
- Operating time	60 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	1,000 ft ³ /min (28 m ³ /min)
- Control	Manual Timer (Optional) Wireless (Optional)
- Connection	IEC (Power)
- Optional accessories	HC-1 Cable Timer Remote HCR-1 Wireless Remote
- Dimension	L484 W250 H294 mm (L19.06 W9.84 H11.57 inch)
- Weight	12 kg (26.46 lbs)

EFFECTS



ACCESSORIES



HC-1 Cable Timer Remote

HCR-1 Wireless Remote

FLUID



HZL-1 Haze Fluid

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

HZ-350



HZ-350 Haze Machine

HZ-350, a brand new haze machine from Antari with not only the reliable quality as a tradition but also new charming features!

With the innovative LCD control panel built in the machine, now you can master this classic haze machine without effort at all. The digital LCD control system now allows users to set the timer and DMX address directly and accurately.


Furthermore, wireless on/off control is another excitement for users who need to execute the output timing.

Now just try it to believe it!

Specification

- Input voltage	AC 100-120V, 50/60Hz 3.25A AC 220-240V, 50/60Hz 1.7A
- Rated power	390W
- Fluid consumption	0.8 ml/min
- Fluid tank capacity	2.5l (0.66gal)
- Compatible fluid	Antari HZL Haze Fluid
- Operating time	52 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	2,000 ft ³ /min (57 m ³ /min)
- Control	DMX, Timer, Manual, Wireless
- DMX channels	1 channel
- Connection	1EC (Power) XLR 5-pin (DMX)
- Optional accessories	HC-1 Cable Timer Remote
- Dimension	L492 W273 H315 mm (L19.37 W10.75 H12.40 inch)
- Weight	14.2 kg (31.31 lbs)

EFFECTS & FUNCTION



Effect



Control Panel

ACCESSORIES

INCLUDED



W-1 Wireless Remote

OPTIONAL



HC-1 Cable Timer Remote

FLUID



HZL-2 Haze Fluid

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

HZ-400



Product No. (710104) 220000 010207

HZ-400 Haze Machine

The HZ-400 is equipped with an internal, maintenance-free air compressor, a sophisticated haze transfer mechanism, and a specially designed fluid tank. The HZ-400 is equipped with two haze nozzles capable of producing virtually invisible large volume of haze output.

The fine translucence and non-stop output produced by HZ-400 makes it more remarkable by the fact that with this hazer there are no temperature controls, hot air and warm-up times during operation.

Its internal compressor is extremely powerful, quiet and very efficient. With an added on-board DMX which provides users to control the unit by any DMX 512.

HZ-400 Professional Haze machine is the elegant combination between the ultimate haze quality from high capacity, low fluid consumption and silent operation demanded by professionals.

Specification

- Input voltage	AC 100-120V, 50/60Hz 3.92A AC 220-240V, 50/60Hz 2A
- Rated power	470W
- Fluid consumption	1.1 ml/min
- Fluid tank capacity	2.5l (0.66gal)
- Compatible fluid	Antari HZL Haze Fluid
- Operating time	37 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	2,800 ft ³ /min (79 m ³ /min)
- Control	DMX, Timer, Manual Wireless (Optional)
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Optional accessories	HCR-1 Wireless Remote
- Dimension	LS00 W320 H319 mm (L19.69 W12.60 H12.56 inch)
- Weight	18.5 kg (40.79 lbs)

EFFECTS & FUNCTION



Effect

Rear Panel

ACCESSORIES



HC-1 Cable Timer Remote

HCR-1 Wireless Remote

FLUID



HZL-1 Haze Fluid

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

HZ-500

Hazer Technology



HZ-500 Haze Machine

Antari is proud to unveil the innovative HZ-500 Hazer with passion, to entertainment industry. This groundbreaking masterpiece created by Antari R&D team is invested with profound experience in studying and designing haze machines after years of hard work.

Therefore, the performance of HZ-500 is second to none and better than any other hazers on stage. It can work perfectly with laser beam and lighting to bring the best atmospheric effects to all events.

HZ-500 is definitely the best choice for all stage designers, performers, and audiences who are sensitive to surrounding settings. The extraordinary low fluid consumption rate makes HZ-500 more energy-efficient and more environmental-friendly. Last but not the least, its silent operation is highly demanded by professionals.

Specification

- Input voltage	AC 100-120V, 50/60Hz 4A AC 220-240V, 50/60Hz 2A
- Rated power	480W
- Fluid consumption	1.1 ml/min
- Fluid tank capacity	2.5l (0.66gal)
- Compatible fluid	Antari HZL Haze Fluid
- Operating time	37 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	3,000 ft ³ /min (85 m ³ /min)
- Control	DMX, Timer, Manual
- DMX channels	1 channel
- Connection	IEC (Power) XLR 5-pin (DMX)
- Dimension	L490 W351 H338 mm (L19.29 W13.82 H13.31 inch)
- Weight	31.5 kg (69.45 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

FUNCTION



Sealed Rubber Plug for Fluid Tank



Fluid Level Indicator



HZ-500 Control Panel



Interior Look of HZ-500

FLUID



HZL-1 Haze Fluid

S-120

FOAM MACHINE



S-120 Foam Machine

Antari S-120 is a reliable and eco-friendly foam generator. Produces clear and bubbly foam suitable for wide variety of applications.

Simply turn on the machine to generate foam continuously, space will be filled up with foam in minutes. With specially calibrated SL foam fluid produces high quality foam which are safe, clean and odorless.

This compact and easy to operate machine is designed for small to medium size parties, stage and venues.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 7.5A AC 220-240V, 50 / 60Hz 3.8A
- Rated power	880W
- Fluid consumption	350 ml/min
- Fluid tank capacity	5l (1.32gal)
- Compatible fluid	Antari SL Snow Foam Fluid
- Operating time	14 mins at max. output
- Ambient temp. range	5 °C - 40 °C (41 °F-104 °F)
- Control	Manual
- Connection	IEC (Power)
- Dimension	1600 W260 H280 mm (L23.62 W10.24 H11.02 inch)
- Weight	12 kg (26.46 lbs)

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



SNOW MACHINE **S-100X** SNOW MACHINE **S-200X**



S-100X & S-200X Snow Machine

With newly-developed PCB and advanced pump, S-100X and S-200X can be even more reliable and generate 50% more snow outputs than their predecessors, S-100II and S-200.

They can create both romantic snow and astonishing blizzard effects. Its working noise level is much lower, which is great for environments where quiet condition is required.

S-100X Specification

- Input voltage	AC 100-120V, 50 / 60Hz 7.5A AC 220-240V, 50 / 60Hz 3.8A
- Rated power	880W
- Fluid consumption	160 ml/min
- Fluid tank capacity	5l (1.32gal)
- Compatible fluid	Antari SL Snow Foam Fluid
- Operating time	30 mins at max. output
- Ambient temp. range	5 °C - 40 °C (41 °F-104 °F)
- Control	DMXS12, Manual
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Dimension	L505 W276 H310 mm (L19.88 W10.87 H12.20 inch)
- Weight	11 kg (24.25 lbs)

S-200X Specification

- Input voltage	AC 100-120V, 50 / 60Hz 7.5A AC 220-240V, 50 / 60Hz 3.8A
- Rated power	880W
- Fluid consumption	140 ml/min
- Fluid tank capacity	5l (1.32gal)
- Compatible fluid	Antari SL Snow Foam Fluid
- Operating time	35 mins at max. output
- Ambient temp. range	5 °C - 40 °C (41 °F-104 °F)
- Control	DMXS12, Manual
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Dimension	L505 W276 H310 mm (L19.88 W10.87 H12.20 inch)
- Weight	11.5 kg (25.35 lbs)

EFFECTS & FUNCTION



ACCESSORIES



SC-2 Cable Remote

FLUID



SL Snow Foam Fluid

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

SW-250



SW-250 Wireless Snow Machine

With all the advantages of S-100X and S-200X, the SW-250 is the enhanced version of Antari's snow machine series. Equipped with the easy-to-use LCD control panel which allows users to set the snow output volume and timing much more precisely by selecting output percentage and duration time, the SW-250 gets rid of the cable control by making the wireless control system the standard accessory. The snow machine can be activated and deactivated simply by a touch on the W-1 transmitter thanks to the convenience of the wireless control system.

Now it's possible to have the effects from a touch of snow flakes to real blizzard exactly as what you expected whenever needed all year round without waiting!


Specification

- Input voltage	AC 100-120V, 50 / 60Hz 7.5A AC 220-240V, 50 / 60Hz 3.8A
- Rated power	880W
- Fluid consumption	140 ml/min
- Fluid tank capacity	5l (1.32gal)
- Compatible fluid	Antari SL Snow Foam Fluid
- Operating time	35 mins at max. output
- Ambient temp. range	5 °C - 40 °C (41 °F-104 °F)
- Control	DMXS12, Timer, Manual, Wireless
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Optional accessories	SC-2 Cable Remote
- Dimension	1539 W276 H310 mm (L21.22 W10.87 H12.20 inch)
- Weight	11.5 kg (25.35 lbs)

EFFECTS & FUNCTION



ACCESSORIES



FLUID



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

S-500



S-500 & S-500L Snow Machine

Meet Antari's latest snow machine: The S-500. Its main body and 20-Liter fluid tank are placed inside a road case with wheels.

The nozzle is connected by a 10-Meter long hose and it can be easily rigged on a standard truss or tripod stand. Air and snow fluids are delivered to nozzle via the 10-Meter hose. Users can adjust the air volume and fluid flow rate to get the right snow effects needed, from fine snow to blizzards.

The functions of S-500L are exactly same as S-500. The only two differences between S-500L and S-500 are S-500L comes with 20-Meter hose in a larger case. The "L" of S-500L stands for "Large".

Features

- Optional PM-1 pan motor with 120 degrees pan to increase coverage area
- Blower built into flight case keep noise level at minimum
- Extreme high output
- Adjustable snowflake size
- Road case for outdoor operation and provide extra protection

S-500 Specification

- Input voltage	AC 100-120V, 50 / 60Hz 7.5A AC 220-240V, 50 / 60Hz 3.8A
- Rated power	880W
- Fluid consumption	400 ml/min
- Fluid tank capacity	20L (5.28gal)
- Compatible fluid	Antari SL-20N Snow Foam Fluid Antari SL-20AN Premium Snow Fluid
- Operating time	50 mins at max. output
- Ambient temp. range	5 °C - 40 °C (41 °F-104 °F)
- Control	DMX512, Timer, Manual Wireless (Optional) Wireless DMX (Optional)
- DMX channels	2 channels
- Connection	Neutrik Powercon (Power) XLR 3-pin and 5-pin (DMX)
- Optional accessories	W-DMX-PCBR Wireless DMX 512 WTR-20 Wireless Remote WTR-70 Wireless DMX 512 and Remote SC-3 Cable Remote ST-10 10 Meters Extension Hose PM-1 Pan Motor
- Dimension	L592 W551 H651 mm (L23.31 W21.69 H25.63 inch)
- Weight	37.2 kg (82.01 lbs)

S-500L Specification

- Dimension	L803 W603 H651 mm (L31.61 W23.74 H25.63 inch)
- Weight	46.4 kg (102.29 lbs)

ACCESSORIES



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

ANTARI (USA) 408-645-1111
ANTARI (CHINA) 86-515-88447777
ANTARI (TAIWAN) 86-515-9900 86-515-5533

B-100



B-100 / B-100X Bubble Machine

This handy party gizmo is equipped with "Double Bubble Wheel" designed to produce steady, continuous stream of bubbles.

B-100's frontal outlet directs a high output of bubbles up in to the air while simultaneously recycling liquid and eliminating dripping. The durable motor is set in a robust casing, capable of continuous operation. Easy refills and the included hanging bracket makes B-100 a simple to operate and versatile machine.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 0.25A AC 220-240V, 50 / 60Hz 0.13A
- Rated power	30W
- Fluid consumption	8.3 ml/min
- Fluid tank capacity	0.7l (0.18gal)
- Compatible fluid	Antari BL Bubble Fluid
- Operating time	1.4 hrs at max. output
- Ambient temp. range	5 °C - 40 °C (41°F-104 °F)
- Control	Manual
- Optional accessories (B-100X Model Only)	Timer (Optional) Wireless (Optional) Z-10 Cable Remote BCT-1 Timer Remote BCR-1 Wireless Remote
- Dimension	L341 W170 H217 mm (L13.43 W6.69 H8.54 inch)
- Weight	4.2 kg (9.26 lbs)

EFFECTS



ACCESSORIES

< Control accessories only for model B-100X >



FLUID



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

B-200



B-200 High Output Bubble Machine

B-200 equipped with four "Double Bubble Wheel" to produce extensive amount of bubble, the set of 3 fans at the back carry the bubble farther to increase coverage area.

Heavy-duty casing comes with hanging bracket for ease of installation. No tray designed allows to pour bubble fluid directly from its frontal outlet, with a drain hole on the side to make cleaning a hassle free process.

On-board DMX, optional timer remote and wireless remote fulfill all kinds of control requirement. B-200 is designed for large size clubs, theatrical production and venues.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 0.85A AC 220-240V, 50 / 60Hz 0.42A
- Rated power	100W
- Fluid consumption	50 ml/min
- Fluid tank capacity	2l (0.53gal)
- Compatible fluid	Antari BL Bubble Fluid
- Operating time	40 mins at max. output
- Ambient temp. range	5 °C - 40 °C (41°F-104 °F)
- Control	DMX 512, Manual Timer (Optional) Wireless (Optional)
- DMX Channels	1 channel
- Connection	IEC (Power) XLR 5-pin (DMX)
- Optional accessories	BCT-1 Timer Remote BCR-1 Wireless Remote
- Dimension	L421 W250 H213 mm (L16.57 W9.84 H8.39 inch)
- Weight	11 kg (24.25 lbs)

EFFECTS



ACCESSORIES



FLUID



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

LCU-1S

Liquid Control Unit



LCU-1S Smart Liquid Control Unit

The latest LCU-1S comes with a LCD panel allows user to read and make setting with ease.

LCU-1S is preprogrammed for use with Z-1200H, S-100X, S-200X and SW-250, flow rate are adjusted to supply one unit at the time. An optional "Null" mode offers versatility for use with any model, running the pump at 100% output; enable it to supply up to maximum 4 units at a time.

LCU-1S can supply fluid to 35 meters long or 25 meters high at maximum, designed to meet most remote fluid supply application.

Specification

- Input voltage	AC 100-120V, 50 / 60Hz 0.35A AC 220-240V, 50 / 60Hz 0.18A
- Rated power	48W
- Fluid consumption	400 ml/min
- Compatible fluid	Antari Fluid
- Ambient temp. range	5 °C - 40 °C (41 °F-104 °F)
- Control	DMXS12, Timer, Manual
- DMX channels	1 channel
- Connection	XLR 3-pin (DMX)
- Optional accessories	Z-8 Remote Control SC-2 Remote Control
- Dimension	L203 W179 H96 mm (L7.99 W7.05 H3.78 inch)
- Weight	3.3 kg (7.28 lbs)


FUNCTION



Distributed by:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it


System Diagram

Supplying fluid to one machine (Z-1200H/S-100X/S-200X/SW-250), select pre-programmed flow rate with matching model. Control data through 4-pin XLR.



System Diagram


Supplying fluid to multiple machine (Z-1200H/S-100X/S-200X/SW-250), select "Null" mode with maximum flow rate. Control data through 4-pin XLR.

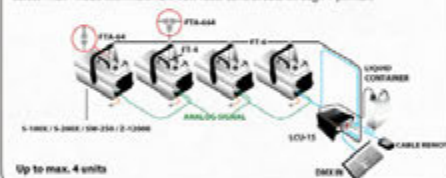

Up to max. 4 units

System Diagram

Supplying fluid to multiple machine, select "Null" mode with maximum flow rate. Control data through DMX connection.

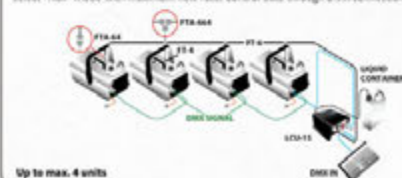

Up to max. 4 units

ANTARI AF-3



AF-3 / AF-3X Effects Fan

The AF-3 is a compact all-purpose stage fan features multiple control options, linear output control, low power consumption, adjustable blowing directions, and durable metal housing.

In addition to the onboard DMX control and the manual knob, cable and wireless controllers are optional to cope with diverse needs. Total power consumption is merely 120W.

The attached bracket enables various output directions within 90 degrees while hanged or placed on the floor. Solid and handy design allows easy carry and storage.

Specification

- Input voltage	AC 100-120V, 50/60Hz 1A AC 220-240V, 50/60Hz 0.5A
- Rated power	120W
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Air flow	900 m³/hr, 530 CFM (50Hz) 1020 m³/hr, 600 CFM (60Hz)
- Fan speed	750 - 2550 rpm (50Hz) 750 - 2800 rpm (60Hz)
- Control	DMX, Manual Wireless (Optional)
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 3-pin (DMX)
- Optional accessories	WTR-10 Wireless Remote Z-3 Cable Remote
- Dimension	L124 W316 H368 mm (L4.88 W12.44 H14.49 inch)
- Weight	6 kg (13.23 lbs)

EFFECTS



180°

Angle of 45°

Hanging Style

ACCESSORIES



W-2 Transmitter x 1
W-1 Receiver x 1



Z-3 Cable Remote

Distributed by
AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

AF-5

AF-5 / AF-5R Effects Fan

AF-5 is a special effect fan with 3 speed setting to fulfill different wind effect requirement. It provides wind effects when using by itself, it also can work with other effect machine such as fog, haze, snow and bubble to increase the coverage.

Extra foot stand design allows the wind to blow in two directions when placing on the floor. With optional hanging bracket offers other possibilities for installation requirements.

Stand-alone, On-board DMX and optional wireless control satisfy different control requirements.

Specification

- Input voltage	AC 100-120V, 50/60Hz 13.4A AC 220-240V, 50/60Hz 6.7A
- Rated power	1600W
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Horsepower	1HP
- Housing Material	Flame retardant plastic (PE 9731)
- Control	DMX, Manual Wireless (Optional)
- DMX channels	1 channel
- Connection	XLR 5-pin (DMX)
- Optional accessories	W-1 Wireless Remote AF-5-HB Hanging Bracket
- Dimension	L558 W465 H578 mm (L21.97 W18.31 H22.76 inch)
- Weight	17.5 kg (38.58 lbs)

FUNCTION



Fan Speed Control

ACCESSORIES



W-1 Transmitter x 1
W-1 Receiver x 1
For Model AF-5R Only



AF-5-HB Hanging Bracket

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



Antari Fog Fluids

Antari fog fluid are optimized for use with all Antari fog machines and are suitable for most models of foggers. They are all water-based composition that leaves no oily residue.

All of the fluid are odorless, non-irritating, non-toxic, and non-flammable. They preserve the longevity of your machines.

Our Material Safety Data Sheets (MSDS) and safety reports from SGS are complied by an independent laboratory for strictest tests.

The Antari fog fluid are eco-friendly to our environment and to human contact.

Antari fog fluid comes in 3 varieties :

FLC Super Light Fog Fluid (clear) produces fog which dissipates in the air fastest.

FLR Light Fog Fluid (red color) produces fog which disappears in the air faster.

FLG Heavy Fog Fluid (green color) produces fog which has a longer lasting time.

They are available in 1, 2, 4, 5, 6, 10, 20 and 200 Liters.

FLC : FLC-1, FLC-2, FLC-4, FLC-5, FLC-6, FLC-10, FLC-20, FLC-200

FLR : FLR-1, FLR-2, FLR-4, FLR-5, FLR-6, FLR-10, FLR-20, FLR-200

FLG : FLG-1, FLG-1E, FLG-2, FLG-4, FLG-5, FLG-5E, FLG-6, FLG-10, FLG-20, FLG-200

*The number -1, -2, -4, -5, -6, -10, -20, -200 indicates the volume in liters.

The choice of fog fluid will depend on which Antari machine is used and also the density of fog you look for.



Distributed by:

AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it



FLM-05 Fog Fluid

The FLM-05 is 500ml per bottle, and it's a special-formulated water based fog fluid for M-1 & FT-20 fogger. With best quality, no artificial colors are added. Capable to generate the pure and clean fog when goes with compatible models.



Oil Based Haze Fluid

HZL : Specially composed haze fluid, HZL is a non-toxic solution that produces a pure, translucent haze with an extremely long hanging time and low moisture content. Colorless, odorless and non-flammable, HZL leaves no residue or contamination and complies with the strictest health and safety regulations. Its composition will increase machine's lifespan for HZ-100 / 350 / 400 / 500 / 1000
HZL-1 : Haze fluid (1 liter) / HZL-5 : Haze fluid (5 liter)



Bubble Fluid

Antari bubble fluid is a water-based composition that creates vivid, transparent bubbles. The liquid is colorless, odorless and non-flammable. The Antari bubble fluid is available in either one or five liter containers.
BL-1 : Bubble fluid (1 liter) / BL-5 : Bubble fluid (5-liter)



FLP Fire Training Fog Fluid

Antari FLP fog fluid is specifically made for Fire Training purpose.

Product Features :

- The ingredients of this water-based fog fluid are refined from palm trees.
- It is 100% natural, completely non-toxic and safe.
- It can produce high density fog and is ideal for using in poor ventilation environments (such as fire drill or rescue training...etc.)



Snow Fluid

There are four types of snow fluids among Antari range. The different features are listed as follows:

SL

- Mild formula
- Good for indoor operation

SL-A

- Mild formula
- Good for indoor operation
- Lighter weight of snowflakes
- Faster dissipation which leaves less residue in the floor

SL-N (New Formula)

- Good for outdoor operation
- Can create higher volume snow outputs

SL-AN (New Formula)

- Good for outdoor operation
- Lighter weight of snowflakes
- Faster dissipation which leaves less residue in the floor
- Can create higher volume snow outputs

They are all available in 5, 20 and 200 Liters.



Scent

Simply put a few drops of these high quality scent into the fluid tank. You will have scented fog right away! 6 fragrances are available in a standard 20 ml bottle. The ideal mix ratio of scent and fluid is 1:1000 For instance: adding 1ml scent into 1liter fog tank will have the best effect of scented fog.

- P-1 : Rose P-2 : Mint P-4 : Apple P-6 : Lemon
P-3 : Strawberry P-9 : Orange



C-300

Antari C-300 is a cleaning solution that you can use to clean and maintain Antari fog and snow machines. Using it properly and regularly can give you the best performance and the longest lifetime of products.



MG-550 Magican

The world's smallest haze spray ; the Magican produces a long lasting haze with 1-2 hours of hanging time. One Magican will haze continuously for five minutes.

A haze effect can be achieved after approximately 20 seconds of spraying in an average sized room, allowing for approximately 15 hazing sessions per can. The Magican is designed for situations where only a relatively small amount of haze is needed. It is perfect for mobile DJs and home parties.

Distributed by:

AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it



Distributed by:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

CONTROL MODULE
REMOTE ACCESSORIES



W-1 Wireless Radio Transmitter

- Working Distance : Up to 50 M
- Function : Wireless ON/OFF
- There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : AF-3, AF-5, F-1, HZ-350, IP-1500, M-4, SW-250, W-101, W-510, W-508, W-5150, W-5300, W-715

Main Features :

1. Simple setting and operation : one click to register ; one click to go ; and one click to stop.
2. Interchangeability : W-1 wireless radio transmitter is compatible with all Antari W series (signal receivers)
3. Modern metallic design honors your vision and professional.



WTR-10

- W-1 Transmitter x 1
- W-1 Receiver x 1
- Compatible With : AF-3, AF-5R, F-1

WTR-20

- W-2 Transmitter x 1
- W-2 Receiver x 1
- Compatible With : AF-4R, FT-20, S-500, S-500L, Z-380

WTR-30

- W-1 Transmitter x 1
- W-2 Receiver x 1
- Compatible With : M-4

WTR-40

- W-1 Transmitter x 1
- W-DMXW1R x 1
- W-DMX-PCB x 1
- Compatible With : F-1



W-2 Wireless Radio Transmitter

W-2 is the advanced version of W-1 wireless radio transmitter. Compare to W-1, the biggest difference is W-2 comes with 4 buttons, which makes it more versatile.

- Working Distance : Up to 50 M
- Function : Wireless ON/OFF and Volume UP/DOWN
- There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : AF-4R, FT-20, FT-100, FT-200, M-7RGBA, S-500, S-500L, Z-1520, Z-380



WTR-50

- W-1 Transmitter x 1
- W-DMXW1R x 1
- Compatible With : F-1

WTR-60

- W-DMXW1R x 1
- W-DMX-PCB x 1
- Compatible With : F-1

WTR-70

- W-2 Transmitter x 1
- W-DMX-PCB x 1
- W-DMXW2R x 1
- Compatible With : S-500, S-500L



W-1 Receiver



W-2 Receiver



W-DMXW1R
W-DMX and W-1 Receiver



W-DMXW2R
W-DMX and W-2 Receiver



W-DMX-PCB



W-DMXR
W-DMX Receiver

WTR-80

- W-2 Transmitter x 1
- W-DMXW2R x 1
- Compatible With : S-500, S-500L

WTR-90

- W-DMX-PCB x 1
- W-DMXW2R x 1
- Compatible With : M-7 R08A, S-500, S-500L

WTR-100

- W-1 Transmitter x 1
- W-DMX-PCB x 1
- W-DMXW2R x 1
- Compatible With : M-4

W-DMX-PCBR

- W-DMX-PCB x 1
- W-DMXR x 1
- Compatible With : F-1, F-4, M-4, M-7R08A, HZ-1000

Distributed by:

AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

There are 2 radio frequencies can be chosen.
They are 315MHz and 433MHz respectively.



D-20

- Cable Length : 2 M
- Connector : 5 Pin XLR
- Function : Timer with interval, duration and volume; 4 Volume output choices (with non-stop fogging); Set DMX addresses; manual ON/OFF. (All above functions are displayed on a LCD screen & can be set precisely in seconds or percentage)
- Compatible With : DNG-200



M-20

- Cable Length : 2 M
- Connector : 5 Pin XLR
- Function : Timer with interval, duration and volume; set DMX address; continuous fogging; manual ON/OFF. (All above functions are displayed on a LCD screen and can be set precisely in seconds or percentage)
- Compatible With : M-5, M-10



M-21

- Cable Length : 2 M
- Connector : 5 Pin XLR
- Function : Timer with interval, duration and volume; set DMX address; manual ON/OFF. (All above functions are displayed on a LCD screen)
- Compatible With : M-8



M-30PRO

The M-30 PRO Wireless Control Module, as its name suggests, adds wireless operation to your M-5 and M-10 machines. The M-30 PRO delivers radio frequency technology you can depend on. You have the flexibility of wireless technology and the functionality you expect from Antari.

- Cable Length : 2 M
- Working Distance : Wireless, up to 50 M
- Connector : 5 Pin XLR
- For W-1 Wireless Transmitter, there are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : M-5, M-10



M-31

The M-31 Wireless Control Module, as its name suggests, adds wireless operation to your M-8 machine. The M-31 delivers radio frequency technology you can depend on. You have the flexibility of wireless technology and the functionality you expect from Antari.

- Cable Length : 2 M
- Working Distance : Wireless, up to 50 M
- Connector : 5 Pin XLR
- For W-1 Wireless Transmitter, there are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : M-8



Z-20

- Cable Length : 2 M
- Connector : 5 Pin XLR
- Function : Timer with interval, duration and volume; set DMX address; continuous fogging; manual ON/OFF. (All above functions are displayed on a LCD screen and can be set precisely in seconds or percentage)
- Compatible With : Z-1500II, Z-3000II



Z-30PRO

The Z-30PRO Wireless Control Module, as its name suggests, adds wireless operation to your Z-1500II and Z-3000II machines. The Z-30PRO delivers radio frequency technology you can depend on. You have the flexibility of wireless technology and the functionality you expect from Antari.

- Cable Length : 2 M
- Working Distance : Wireless, up to 50 M
- Connector : 5 Pin XLR
- For W-1 Wireless Transmitter, there are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : Z-1500II, Z-3000II

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

**Z-3
Remote**

- Cable Length : 3M
- Connector : 1/4 Stereo
- Function : Volume , ON/OFF
- Compatible With : Z-350, AF-3, FT-100, FT-200

**Z-8
Timer Remote**

- Cable Length : 25 ft
- Connector : 4 Pin XLR
- Function : Timer with interval, duration and volume; continuous fogging; manual ON/OFF
- Compatible With : Z-1200II, ICE-101

**Z-40
Timer Remote**

- Cable Length : 25 ft
- Connector : 1/4 Stereo
- Function : Timer with interval and duration; manual ON/OFF
- Compatible With : Z-800II, Z-1000II, Z-1020

**Z-50
Wireless Remote**

- Working Distance : Up to 50 M
- Connector : 1/4 Stereo
- Function : Wireless ON/OFF
- Compatible With : Z-800II, Z-1000II, Z-1020

**Z-9
Wireless Remote**

- Working Distance : Up to 50 M
- Connector : 4 Pin XLR
- Function : Wireless ON/OFF
- Compatible With : Z-1200II

**Z-10
Remote**

- Cable Length : 25 ft
- Connector : 1/4 Stereo
- Function : ON/OFF (Toggle Switch)
- Compatible With : Z-800II, Z-1000II, Z-1020, B-100X, B-200, HZ-350

**BCR-1
Wireless Remote**

- Working Distance : Up to 50 M
- Connector : 1/4 Stereo
- Function : Wireless ON/OFF
- Compatible With : B-100X, B-200

**BCT-1
Timer Remote**

- Cable Length : 25 ft
- Connector : 1/4 Stereo
- Function : Timer with interval and duration; manual ON/OFF
- Compatible With : B-100X, B-200



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



HC-1 Timer Remote

- Cable Length : 25 ft.
- Connector : 1/4 Stereo
- Function : Timer with interval and duration; manual ON/OFF
- Compatible With : HZ-100, HZ-350, HZ-400



HCR-1 Wireless Remote

- Working Distance : Up to 50 M
- Connector : 1/4 Stereo
- Function : Wireless ON/OFF
- Compatible With : HZ-100, HZ-400



MCR-1 Wireless Remote

- Working Distance : Up to 50 M
- Connector : 4 Pin DIN
- Function : Wireless ON/OFF
- Compatible With : M-1



MCT-1 Timer Remote

- Cable Length : 8M
- Connector : 4 Pin DIN
- Function : Timer with interval and duration; manual ON/OFF
- Compatible With : M-1



SC-2 Remote

- Cable Length : 25 ft.
- Connector : 4 Pin XLR
- Function : ON/OFF and volume
- Compatible With : S-100X, S-200X, SW-250




SC-3 Remote

- Cable Length : 25 ft.
- Connector : 4 Pin XLR
- Function : Timer with interval and duration; manual ON/OFF
- Compatible With : S-500

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

Hanging Bracket Sets



M-5-HB

Hanging Bracket For M-5, M-8



IP-1500-HB

Hanging Bracket For IP-1500



W-510-HB, W-515-HB

- W-510-HB : Hanging Bracket For W-510
- W-515-HB : Hanging Bracket For W-515D, W-530D



Fluid Tubes / Adaptors / Filters

- FT-4 : 4mm Fluid tube
- FT-6 : 6mm Fluid tube
- FLF-4 : Fluid filter for 4mm tube
- FLF-6 : Fluid filter for 6mm tube
- FTA-64 : Adaptor for 4mm to 6mm tube connection
- FTA-66 : Adaptor for 6mm to 6mm tube connection
- FTA-664 : T-type adapter for two 6mm tubes to one 4mm tube connection



EXT-1



EXT-3/4/6



EXT-5

Remote Control Extension Cables

- EXT-1 : 25 ft. extension cable with 1/4 stereo plug
- EXT-3 : 25 ft. extension cable with 5-pin XLR connectors
- EXT-4 : 25 ft. extension cable with 3-pin XLR connectors
- EXT-5 : 25 ft. extension cable with 5-pin DIN connectors
- EXT-6 : 25 ft. extension cable with 4-pin XLR connectors



Fog Hose Adaptor

Adaptor for connecting fog conducting hose FT-10 for DNG-100 Fog Cooler to the desired Antari fog machine.

- FTA-1 : Adaptor for connecting fog conducting hose FT-10 to M-5, M-10, W-510, W-515D and W-5300 fog machines, in order to achieve strategic fog placement.
- FTA-2A : The same function as the FTA-1, specifically designed for Z-1000II and Z-1200II fog machines.
- FTA-3 : The same function as the FTA-1, specifically designed for Z-1500II and Z-3000II fog machines.



Fog Conducting Hose FT-10

Fog conducting hose with 12cm diameter and is 10 meters in length.

The DNG-100 Low fog cooler is equipped with one FT-10 to connect to the fog machine. This additional hose is needed to redirect the fog output coming out of the DNG-100.

With this optional hose, fog can be extended anywhere within 10m of the DNG-100.

FTA-11

Fog conducting hose adaptor for DNG-100. The hoses adaptor can be installed on it and this can split low fog output into two.



FTA-200 Fog Conducting Hose Adaptor

Fog conducting hose adaptor for DNG-200. The hoses adaptor can be installed on it and this can split low fog output into two.



FDNG-200

- Dimensions (mm) : L 865 W 695 H 1020
- Weight : 46.5 kg
- Compatible With : DNG-200

FX-4

- Dimensions (mm) : L 495 W 418 H 500
- Weight : 12.3 kg
- Compatible With : Z-1020, Z-1520, W-715, Z-350
- Two units in one case



FX-5

- Dimensions (mm) : L 844 W 453 H 378
- Weight : 12.3 kg
- Compatible With : M-5, M-8, M-10, W-515D, W-5300



Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



"Although a watch is a statement of character and fashion, its primary purpose is to measure and communicate our most important resource. That resource is time.

Time is the one thing in which we are all equal. We cannot make more of it no matter how much we try. No amount of money or effort will influence its passing. In the time we have available, every moment must be seized, every opportunity taken.

In a day an idea is borne of inspiration

In a week ideas develop into projects

In a month a prototype is realised, ready for testing

In a year a product enters the market, the end result of time invested and passion committed

A lifetime a record of achievements, of developed ideas, of effort and enthusiasm, from beginnings through growth to maturity; from obscurity to recognition.

This is our commitment to you. Our time is devoted to our partners, supporters and clients - to reach our shared aspirations."



2018
HZ-1000



2003
Original Version



2004
X-Series



2005
X-Series



2006
ZII-Series



2007
ZII-Series



2008
M-5



2009
HZ-500



2010
DNG-200



2011
W-Series



2012
ECO-Series



2013
Z-Series



2014
F-5 Fazer



2015
M-7 RGBA



2016
F-7 Smaze



2017
FT-200

Distributed by:
AMLUX s.r.l.

46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

MODEL	RATED POWER	WARM UP TIME	OUTLET (CUP / min)	FLUID TANK CAPACITY (LITER)	HANGING BRACKET	REMOTE CONTROL	MODEL	ON-BOARD	W-DMS GN-BOARD	W-DMS GN-BOARD	TIME & REMOTE	WHEEL/SS REMOTE	32 P. REMOTE EXTENSION	COMPATIBLE WITH DNC-1W	DNC-1W ADAPTOR	MACHINE LINKABLE
NEW T	AF 3 / AF 3A	120W	N/A	N/A	N/A	YES	2.3 (Optional)	AF 3 / AF 3A	YES	NO	N/A	WTR 10 (Optional)	EXT 1	N/A	N/A	YES
	AF 4 / AF 4A	160W	N/A	N/A	N/A	YES	2.3 (Optional)	AF 4 / AF 4A	YES	N/A	N/A	WTR 20 (For AF 4A Only)	EXT 1	N/A	N/A	YES
	AF 5 / AF 5A	2100W	N/A	N/A	AF 5-10 (Optional)	N/A	AF 5 / AF 5A	YES	N/A	N/A	WTR 30 (For AF 5A Only)	N/A	N/A	N/A	N/A	YES
	B 100 / B 100A	30W	N/A	0.7	YES	B 100 N/A B 100A 2.10 (Optional)	B 100	N/A	N/A	B 100 N/A B 100A BCT 1 (Optional)	B 100 N/A B 100A BCR 1 (Optional)	N/A	N/A	N/A	N/A	N/A
	B 200	300W	N/A	2.0	YES	N/A	B 200	YES	N/A	N/A	BCT 1 (Optional)	BCT 1 (Optional)	EXT 1	N/A	N/A	YES
	DNC-100	120V / 1500W 240V / 800W	N/A	N/A	N/A	N/A	DNC-100	N/A	N/A	N/A	N/A	N/A	-	-	N/A	N/A
	DNC-200	120V / 1500W	120V / 24minutes (approx.)	800W / 10L	N/A	N/A	DNC-200	YES	N/A	N/A	D-20	EXT 3	N/A	N/A	N/A	YES
	DNC-300	240V / 2500W	230V / 12minutes (approx.)	800W / 10L	N/A	N/A	DNC-300	YES	N/A	N/A	D-30	EXT 3	-	-	N/A	N/A
	F 1	700W	4.5 minutes (approx.)	620W	2.4	N/A	F 1	YES	WTR 40 (Optional)	N/A	WTR 10 (Optional)	N/A	N/A	N/A	N/A	YES
	F 4	1400W	1 minutes (approx.)	1400W	5	N/A	F 4	YES	W-DMS PCB (Optional)	N/A	N/A	N/A	N/A	N/A	N/A	YES
F 50	810W	8 minutes (approx.)	800W	2.8	N/A	F 50	YES	YES	N/A	N/A	N/A	N/A	N/A	N/A	YES	
F 7	1620W	8 minutes (approx.)	Tag Mode - 23000, Free Mode - 6000	5	N/A	F 7	YES	YES	N/A	N/A	N/A	N/A	YES	FTA-1	YES	YES
NEW S	FT 30	600W	1 min	N/A	N/A	2.3 (Optional)	FT 30	YES	N/A	N/A	N/A	WTR 20 (Optional)	EXT 1	N/A	N/A	YES
	FT 50 / FT 5A	1400W	7.5 minutes (approx.)	N/A	N/A	FC 1 (For FT 5A Only)	FT 50 / FT 5A	N/A	N/A	N/A	FCR 1 (Optional, For FT 5A Only)	N/A	N/A	N/A	N/A	N/A
	FT 100	1400W	8.5 minutes (approx.)	2000W	6	N/A	FT 100	YES	N/A	N/A	W 2	EXT 1	YES	FTA-1	YES	YES
	FT 200	1600W	7.5 minutes (approx.)	N/A	2.4	N/A	FT 200	YES	N/A	N/A	W 2	EXT 1	N/A	N/A	N/A	YES
	HT 100	180W	N/A	2.3	N/A	N/A	HT 100	N/A	N/A	HC-1 (Optional)	HCW-1 (Optional)	EXT 1	N/A	N/A	N/A	N/A
	HT 200	200W	N/A	2.8	N/A	N/A	HT 200	YES	N/A	HC-1 (Optional)	W 1	EXT 1	N/A	N/A	N/A	YES
	HT 400	470W	N/A	2.5	N/A	N/A	HT 400	YES	N/A	HC-1	HCW-1 (Optional)	EXT 1	N/A	N/A	N/A	YES
	HT 500	490W	N/A	3.00	2.8	N/A	HT 500	YES	N/A	N/A	N/A	N/A	N/A	N/A	N/A	YES
	HT 1000	1130W	N/A	1500W	5.4	N/A	HT 1000	YES	W-DMS PCB (Optional)	N/A	N/A	N/A	N/A	N/A	N/A	YES
	KCE 101	1130W	5.5 minutes (approx.)	1500W	2.4	N/A	KCE 101	YES	N/A	N/A	2.8	N/A	EXT 6	N/A	N/A	YES
NEW T	W 1000	1000W	11.5 minutes (approx.)	1500W	N/A	W 10	W 1000	N/A	N/A	N/A	N/A	N/A	N/A	YES	FTA-2	N/A
	W 1500	1500W	9 minutes (approx.)	2000W	N/A	YES	W 1500	YES	N/A	N/A	N/A	W 1	N/A	YES	FTA-1	YES
	LDU 15	40W	N/A	N/A	N/A	N/A	LDU 15	YES	N/A	N/A	N/A	N/A	N/A	N/A	N/A	YES
	LDU 25	40W	N/A	N/A	N/A	N/A	LDU 25	YES	N/A	N/A	N/A	N/A	N/A	N/A	N/A	YES
	M 1	20W	1 sec	360	110W	N/A	M 1	N/A	N/A	MC-1 (Optional)	MCW-1 (Optional)	N/A	N/A	N/A	N/A	N/A
	M 4	1400W	5 minutes (approx.)	N/A	2.4	N/A	M 4	YES	W-DMS PCB (Optional)	N/A	WTR 10 (Optional, WTR 30 (Optional)	N/A	N/A	N/A	N/A	YES
	M 5	-	-	-	-	-	M 5	-	WTR 100 (Optional)	-	WTR 100 (Optional)	-	-	-	-	-
	M 5	1500W	8 minutes (approx.)	2000W	10	M 5-10 (Optional)	M 20	YES	N/A	N/A	W 20	YES	YES	FTA-1	YES	YES
	M 7 800A	1510W	5 minutes (approx.)	N/A	2.4	N/A	M 7 800A	YES	WTR 30 (Optional)	N/A	W 2	N/A	N/A	N/A	N/A	YES
	M 8	1700W	6.5 minutes (approx.)	3000W	10	M 5-10 (Optional)	M 21	YES	N/A	N/A	W 21	EXT 3	YES	FTA-1	YES	YES
NEW T	M 10	3000W	8.5 minutes (approx.)	8000W	10	N/A	M 20	YES	N/A	N/A	W 20	EXT 3	YES	FTA-1	YES	YES
	S 100A	800W	N/A	N/A	1.0	YES	SC-1	YES	S 100A	YES	N/A	EXT 4	N/A	N/A	N/A	YES
	S 120	800W	N/A	N/A	5.0	YES	S 120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	S 200A	800W	N/A	N/A	5.0	YES	SC-2	YES	S 200A	YES	N/A	N/A	EXT 4	N/A	N/A	YES
	S 250	800W	N/A	N/A	5.0	YES	SC-3 (Optional)	YES	S 250	YES	N/A	N/A	EXT 5	N/A	N/A	YES
	S 500	810W	N/A	N/A	20	N/A	SC-3 (Optional)	YES	S 500	YES	W-DMS PCB (Optional, WTR 70 (Optional)	W 2 (Optional, WTR 30 (Optional, WTR 70 (Optional)	EXT 6	N/A	N/A	YES
	W 101	30W	N/A	0.7	YES	N/A	W 101	N/A	N/A	N/A	W 1	N/A	N/A	N/A	N/A	N/A
	W 108	300W	2 minutes (approx.)	300W	0.8	N/A	W 108	N/A	N/A	N/A	W 1	N/A	N/A	N/A	N/A	N/A
	W 110	1000W	15 minutes (approx.)	1500W	1.8	W 110-10 (Optional)	N/A	N/A	N/A	N/A	W 1	N/A	YES	FTA-1	YES	YES
	W 1150	1400W	10 minutes (approx.)	2000W	6	W 115-10 (Optional)	N/A	N/A	YES	N/A	W 1	N/A	YES	FTA-1	YES	YES
NEW T	W 1300	2500W	12 minutes (approx.)	8000W	8	W 115-10 (Optional)	N/A	N/A	YES	N/A	W 1	N/A	YES	FTA-1	YES	YES
	W 115	1800W	7.5 minutes (approx.)	N/A	2.4	N/A	W 115	YES	N/A	N/A	N/A	N/A	N/A	N/A	N/A	YES
	W 15-500	830W	2 minutes (approx.)	300W	1.8	N/A	W 15-500	N/A	N/A	2.40 (Optional)	W 15-500 (Optional, 2.50 (Optional)	EXT 1	N/A	N/A	N/A	N/A
	Z 800W	800W	4 minutes (approx.)	300W	0.8	N/A	Z 10	N/A	N/A	2.40 (Optional)	Z 10 (Optional)	EXT 1	YES	FTA-2A	YES	YES
	Z 1000W	1000W	8 minutes (approx.)	1200W	1.7	YES	Z 10	N/A	N/A	2.40 (Optional)	Z 10 (Optional)	EXT 1	N/A	N/A	N/A	N/A
	Z 1020	1000W	12 minutes (approx.)	N/A	2.4	N/A	Z 10	YES	N/A	2.40 (Optional)	Z 10 (Optional)	EXT 1	N/A	N/A	N/A	N/A
	Z 1300W	1300W	15 minutes (approx.)	1800W	2.5	YES	N/A	N/A	N/A	2.8	Z 13 (Optional)	EXT 1	YES	FTA-2A	YES	YES
	Z 1500W	1400W	10 minutes (approx.)	2000W	6.0	N/A	Z 20	N/A	N/A	2.20	Z 20PRO (Optional)	EXT 2	YES	FTA-3	YES	YES
	Z 1520 PRO	1510W	8 minutes (approx.)	N/A	2.4	N/A	Z 15	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	YES
	Z 3000W	2500W	12 minutes (approx.)	4000W	6.0	N/A	Z 30	N/A	N/A	2.20	Z 30PRO (Optional)	EXT 3	YES	FTA-3	YES	YES
Z 300	720W	4.5 minutes (approx.)	300W	1.0	N/A	Z 1.5 (Optional)	N/A	N/A	N/A	N/A	EXT 1	N/A	N/A	N/A	YES	
Z 380	120V / 1500W 240V / 1500W	1.5 minutes (approx.)	600W	1.2	YES	Z 380	YES	N/A	N/A	N/A	W 2 (Optional, WTR 30 (Optional)	EXT 1	N/A	N/A	YES	

Distributed by:

AMLUX s.r.l.

46042 Castel Goffredo (MN)

info@amlux.it - www.amlux.it

Distributed by:
AMLUX s.r.l.
 46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it