

Application

Beam style	variable-spread, soft-edged beam
Suitable for	theatres, clubs, small stage areas
Specification level	economy range
Beam angle	7° - 60°
Typical throw distance	2 - 10m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	650W
Lamp base	GY9.5
Auto-disconnect	double-pole microswitch
Cable/connection	1.5m, 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	55mm diameter glass
Lens	120mm diameter Fresnel
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Stirrup rotates 360° around the body of the luminaire
Rear handle	yes
Weight/Packed weight	4 kg / 4,6kg
Packed volume	0,021m ³
Filter cut size	150 x 150mm
Accessory runners	3 slots
Safety guard	included
Colour frame	metal, 150x150mm, supplied
Lamp access	sliding top cover
Lens access	front and via lamp access

Operational specifications

Focus adjustment	slide focus with control underneath
Working position	max. tilting ±90° from horizontal
Beam Shaping	using barndoor accessory
Positional adjustment	single rim-clamp tilt lock

Lamp types

300W 230V	M38 2950K 2000 hrs
500W 230V	T18 3000K 360 hrs / T25 3000K 360 hrs / M40 2950K 2.000 hrs
650W 230V	T26 3050K 600 hrs / T27 3050K 600 hrs
300W 120V	CP81 FKW 3200K 50 hrs
650W 120V	CP89 FKR 3200K 200 hrs

LDR recommends Phillips lamps

Accessories

Spare metal colour frame	■20100103	□20100103B	■20100103C
Spare safety guard	■20100203	□20100203B	■20100203C
4-leaf barndoor	■20100303	□20100303B	■20100303C
	□■20100303D	■20100303E	
Hook clamp	20100900		
Safety bond	20101300		
Colour scroller Xpress 13	20106013 with mounting plate 20600003		

Photometric data

Spot focus											T27
Beam dia.	0.2	0.4	0.5	0.6	0.7	0.9	1.0	1.1	1.2	m	
lux	16600	7378	4150	2656	1844	1355	1038	820	664		
Distance	2	3	4	5	6	7	8	9	10	m	

Flood focus

Beam dia.	2.3	3.5	4.6	5.8	6.9	8.1	9.2	10.4	11.5	m
lux	3096	1376	774	495	344	253	194	153	124	
Distance	2	3	4	5	6	7	8	9	10	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS


tempo[®] f650 Pro

650W fresnel

part number : ■10601200 □10601201 ■10601202



CE

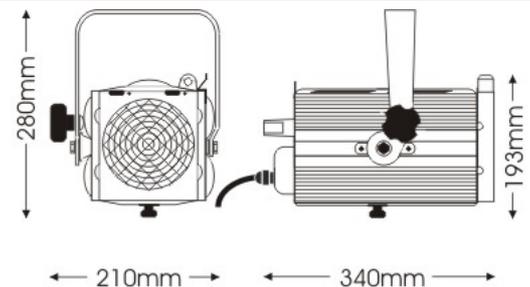

Pro- version of the extremely popular Tempo[®] f650 Plus, featuring a double-microswitch disconnecter for safe lamp replacement.

Tempo[®] f650 Pro is a quality yet budget-priced 500W or 650W Fresnel spotlight. It features a slide-focus variable-spread, soft-edged beam which makes it ideal for small, intimate stage areas.

Also included as standard are a DIN standard colour frame, safety guard and 1.5m mains cable.

LDR
lucidella ribalta

Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2014. LDR reserves the right to alter the specification without prior notice.