




EUROLITE SBT-3216 Power distributor
Practical 32 A distributor in 483 mm housing (19")

- Specially designed for larger distribution needs
- 3 U necessary for installation
- Control lamps indicate each phase

Technical specifications:

Power supply:	380-400 V AC, 50 Hz ~
Max. output/channel (CEE socket):	3680 W
Max. current/channel (CEE socket):	16 A
Max. output/phase:	7360 W
Max. current/phase:	32 A
Height:	3U
Dimensions (LxWxH):	245 x 482 x 132 mm
Weight:	6.6 kg



EUROLITE SB-1200 Power distributor 63A
Practical 63 A distributor in 483 mm housing (19")

- 3 U necessary for installation
- 63 A three-phase current input via 1 meter long 5 x 16 mm² power cable and plug
- The entire distributor is secured via 30 mA Residual Current Device (RCD)
- 2 x 32 A three-phase current outputs via mounted sockets, each individually secured on the rearpanel by a 3-pin 32 A circuit breaker
- 2 x 16 A three-phase current outputs via mounted sockets, each individually secured on the rearpanel by a 3-pin 16 A circuit breaker
- Control lamps indicate each phase

Technical specifications:

Power supply:	380-400 V AC, 50 Hz ~
Max. power:	43470 W
Max. power/phase:	14490 W
Max. current/phase:	63 A
Fuses:	2 x C16A 3 Ph, 2 x C32A 3 Ph, FI/RCD 63A/0.03A
Height:	3 U
Dimensions (LxWxH):	485 x 310 x 132 mm
Weight:	8.3 kg



EUROLITE SBM-16 Power distributor
Practical 16 A distributor in 483 mm housing (19")

- Specially designed for larger distribution needs
- Only 2 U necessary for installation

Technical specifications:

Power supply:	380-400 V AC, 50 Hz ~
Max. power output:	11040 W
Max. output/phase:	3680 W
Max. current/phase:	16 A
Height:	2 U
Dimensions (LxWxH):	482 x 245 x 88 mm
Weight:	3.2 kg



EUROLITE SBM-32 Power distributor
Practical 32 A distributor in 483 mm housing (19")


- 3 U necessary for installation
- 32 A three phase current input via 5 x 6 mm² power cable and plug
- The entire distributor is secured via 30 mA Residual Current Device (RCD)
- Voltage and current display of every phase
- 32 A three phase current output on the rearpanel
- 6 safety sockets on the housing back (2 per phase)
- Each safety socket feature fuse protection via 16 A automatic circuit breakers

Technical specifications:

Power supply:	380-400 V AC, 50 Hz ~
Max. power output:	22080 W
Max. output/phase:	7360 W
Max. current/phase:	32 A
Fuses:	6 x 16A 1 Ph, FI/RCD 40A/0.03A
Height:	3 U
Dimensions (LxWxH):	482 x 230 x 133 mm
Weight:	6.5 kg



EUROLITE SBM-63 Power distributor
Power distributor with multimeter and wheel board

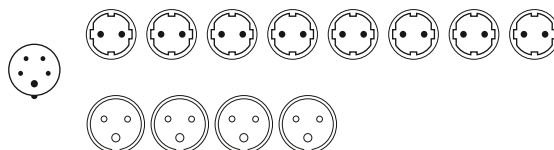

Technical specifications:

Dimensions (LxWxH):	420 x 535 x 405 mm
Weight:	20 kg