

SPECTRA 400 SSM

Cod.UVA400SSM

TORCIA PER SISTEMI STATIVI E MODULARI A RAGGI UV-A PER ESSICCAZIONE, POLIMERIZZAZIONE E RETICOLAZIONE DI COMPOSITI, ADESIVI, RESINE, VERNICI E COLLE


La torcia può essere utilizzata nei sistemi stativi e modulari di essiccazione di prodotti che polimerizzano con raggi UV.

Garantisce alta efficienza luminosa, tempi brevi per essiccare i prodotti, bassa emissione di calore. Le lampade sono provviste di un filtro speciale che taglia le emissioni nocive.

TORCH FOR SYSTEMS STANDS AND MODULAR UV-A FOR DRYING AND CURING OF COMPOSITE, ADHESIVES RESINS, PAINTS AND ADHESIVES

The torch can be used in stands systems and modular drying of products which cure with UV rays. It guarantees high luminous efficiency, short times to dry the products, low heat emission.

The lamps are fitted with a special filter that cuts harmful emissions.

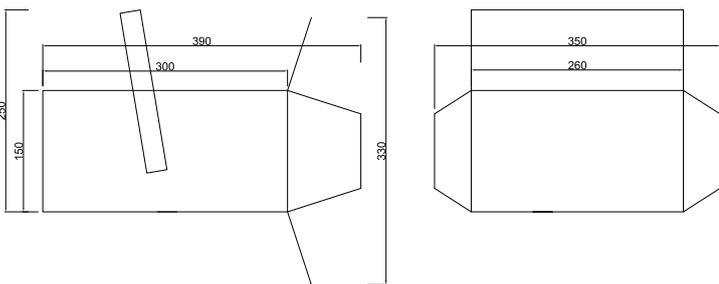


ALIMENTAZIONE - POWER SUPPLY - 250 V 50 Hz

Lamp power	400 W
Intensity	400 mW/cm ² UVA
Output window	140x120 mm
Weight lamp unit	3,2 kg
Weight ballast box	6,3 kg

AVVERTENZE: La lampada genera radiazioni UV-A e vengono ritenute valide tutte le precauzioni comunemente fornite in caso di esposizione alla luce solare: proteggere gli occhi e la pelle dall'esposizione diretta. Durante l'uso utilizzare i seguenti dispositivi di protezione individuale Guanti protettivi per le mani Occhiali con lenti anti-UV con gradazione tra 2 e 4 Usare creme protettive per la pelle e/o le tute di lavoro in caso di prolungate esposizioni.

WARNINGS: The lamp generates UV-A radiation and are considered valid all the precautions commonly provided in the event of exposure to sunlight: protect your eyes and skin from direct exposure. In use, use the following personal protective equipment Protective gloves for the hands Eyewear lenses with anti-UV with gradation between 2 - 4. Use barrier creams to the skin and / or the suits working in the event of prolonged exposure.

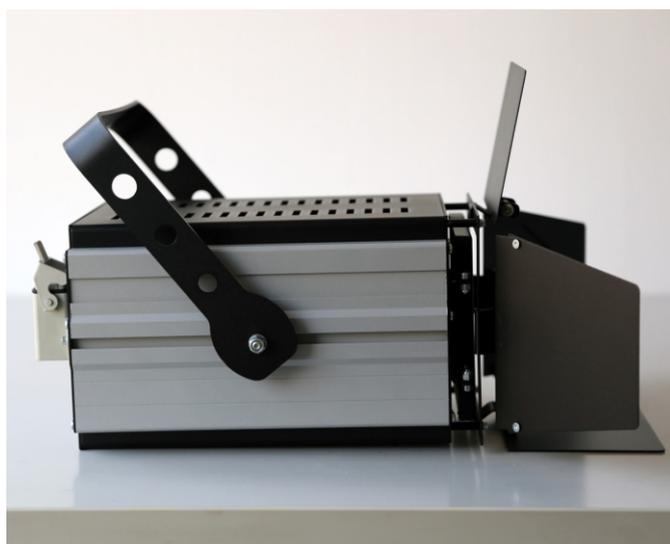



ALIMENTATORE

UVAL 250 - UVAL400 - UVAL1000

Compatibile con tutte le lampade DICRA e STATIVI
(esclusa TORRE 6x400 - Alimentazione dedicata)

Compatible with all DICRA e STATICS Systems

(NO Tower 6x400 - Integrated Power System)



	UVAL250	UVAL400	UVAL1000
POWER	250W	400W	1000W
TENSION	230V 50Hz	230V 50 Hz	250V 50Hz
INPUT CURRENT	1,4A	2,8A	6A
WEIGHT	5Kg	6,5Kg	8,5Kg
H	175mm	175mm	175mm
W	180mm	180mm	180mm
d	255mm	255mm	300mm

