



MASTER MHN-SA

MASTER MHN-SA 2000W/956 400V XW HO UNP/1

Compact quartz metal halide lamps with double-pinch

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information		
Cap-Base	X830R [X830R]	
Operating Position	P15 [Parallel +/-15D or Horizontal(HOR)]	
Life to 5% Failures (Nom)	1700 h	
Life To 10% Failures (Nom)	2300 h	
Life to 20% Failures (Nom)	3000 h	
Life to 50% Failures (Nom)	5000 h	
Light technical		
Color Code	956 [CCT of 5600K]	
Luminous Flux (Rated) (Nom)	226000 lm	
Color Designation	Daylight	
Lumen Maintenance 1000 h (Nom)	96.5 %	
Lumen Maintenance 2000 h (Nom)	92.5 %	
Lumen Maintenance 5000 h (Nom)	78 %	
Chromaticity Coordinate X (Nom)	330	
Chromaticity Coordinate Y (Nom)	366	
Correlated Color Temperature (Nom) 5600 K		

Luminous Efficacy (rated) (Nom)	108 lm/W
Color Rendering Index (Nom)	81
Operating and electrical	
Lamp supply voltage	400 V [400]
Power (Nom)	2095.0 W
Lamp Current Run-Up (Max)	17 A
Lamp Current (EM) (Nom)	11.8 A
Ignition Supply Voltage (Min)	360 V
Voltage (Max)	220 V
Voltage (Min)	185 V
Voltage (Nom)	205 V
Controls and dimming	
Dimmable	No
Mechanical and housing	
Bulb Finish	Clear


Datasheet, 2022, May 5 data subject to change

MASTER MHN-SA

Cap-Base Information	-
Bulb Shape	TD40 [TD 40mm]
Approval and application	
Mercury (Hg) Content (Nom)	215 mg
Energy Consumption kWh/1000 h	2305 kWh
UV	
Specific Eff. Radiant Power	60 mW/klm
Luminaire design requirements	
Bulb Temperature (Max)	1015 °C
Pinch Temperature (Max)	350 ℃

Product data	
Full product code	871829124183600
Order product name	MASTER MHN-SA 2000W/956 400V XW HO
	UNP/1
EAN/UPC - Product	8718291548423
Order code	928195105129
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	928195105129
Net Weight (Piece)	90.000 g


Dimensional drawing

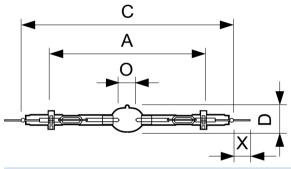

MASTER MHN-SA 2000W/956 400V XW HO UNP/1




Photometric data

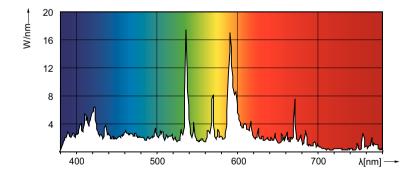


LDPO_MHN-SA_0004-Spectral power distribution Colour

MASTER MHN-SA

Lifetime

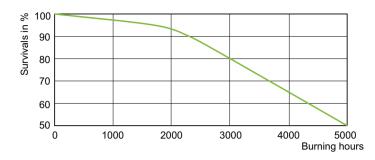

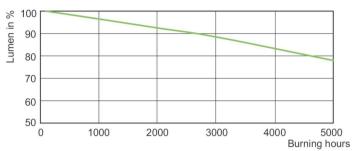

LDLE_MHN-SA_0006-Life expectancy diagram

LDLM_MHN-SA_0006-Lumen maintenance diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.