


Art. no. 100125

LED panel Standard Flex 300x1,200 mm, 36 W,
3,000/4,000/6,000 K, white

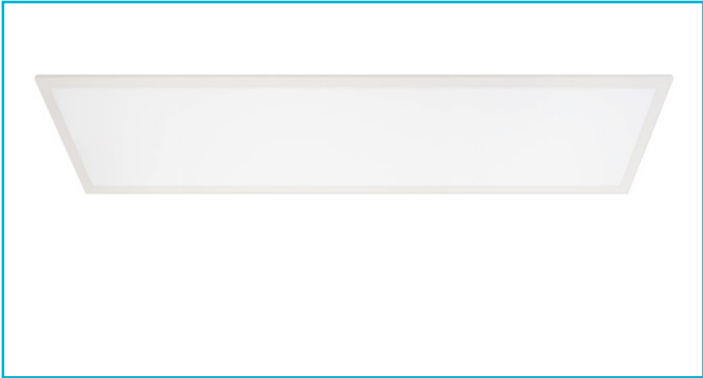

- Special features**
- Light colour adjustable in three stages
 - For insertion into grid ceilings
 - Can be installed in surface-mount or flush-mount frames
 - Suitable for pendant mounting
 - Suitable for reception rooms and hallways
 - Can be combined with a power supply unit as desired [excl.]

Housing Material	Aluminium
Housing Color	White
Material of Lens	PMMA
Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant current
Rated Input	36 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage	33-38 V/DC
Rated Current	1050 mA
Power Supply Unit incl.	No
Dimmable	Yes
Control	Dimmable via optional power supply unit
Motion Detector	No

Product weight	2400 g
Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
IP Protection Class	IP 40
IK Protection Class	IK03
Life Time L70 / B50	40000 h
Switching Cycles	100000
Power Consumption EEI	36 kWh/1000h F

Light Source	LED, Light source not changeable
Color Temperature	3000/4000/6000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
Colour Rendering Index (Ra)	90
Rated Luminous Flux	3570/3990/3780 lm
Luminous Efficiency	105 lm/W
Rated Angle of Reflection	120 Degree
UGR	22
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	1195 mm
Width	295 mm
Height	10 mm

