


Art. no. 730486

Damp-proof light Tri Proof Basic, 36 W, 4,000 K

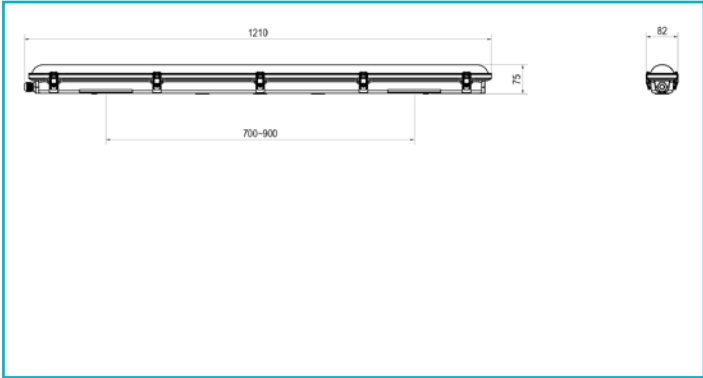

Discover our TRIPROOF BASIC wet room moisture-proof luminaire. The moisture-proof luminaires are eligible for German federal funding and are particularly energy efficient, which means lower operating costs for your customers. With durable construction and a long service life, the luminaires are very long-lasting. The pre-installed feed-through wiring and the practical cable entry points on the back significantly simplify installation. The metal clips ensure they are secured reliably. We also offer variants with a motion detector, where the brightness threshold, detection range and switch-off delay can be adjusted.

- Special features**
- Eligible for BEG German federal funding for energy-efficient buildings
 - Particularly energy efficient
 - Long service life of 50,000 hours L80B50
 - Pre-installed feed-through wiring 3x1.5 mm²/5x1.5 mm²
 - Cable entry point on the back
 - Stainless steel clips on the cover can be locked with screws
 - Robust polycarbonate [PC] plastic housing

Housing Material	Polycarbonate, Steel	IK Protection Class	IK08
Housing Color	Grey	Life Time L80 / B50	50000 h
Halogen free	Yes	Switching Cycles	25000
Functions	D marking	Power Consumption	36 kWh/1000h
Protection Class	Protection class I/protective grounding	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class C.
Rated Input	36 W		
Rated Power Consumption Standby	0.5 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Number of Cable Entries	2 PCS		
Cable Gland Diameter	12 mm		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	4000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	5040 lm		
Rated Angle of Reflection	120 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Length	1210 mm		
Width	82 mm		
Height	75 mm		
Working Temperature	-20 to 40 °C		
Storage Temperature	-40 to 75 °C		
IP Protection Class	IP 65		