




D-LINE



□ ■ ■
page 44



□
page 46



■
page 46



□ ■ ■
page 47



□ ■ ■
page 48



□ ■ ■
page 48



□ ■ ■
page 49



□ ■ ■
page 49



□ ■ ■
page 50



□ ■ ■
page 50



□ ■ ■
page 51



□ ■ ■
page 52



□ ■ ■
page 52



□ ■ ■
page 53



□ ■ ■ ■
page 54



□ ■
page 54



□ ■ ■
page 55



□ ■ ■
page 55



□ ■ ■
page 56



□ ■ ■
page 57



□ ■ ■
page 57



□ ■ ■
page 58



□ ■ ■
page 58



■
page 59



■
page 59



□ ■ ■
page 61



□ ■ ■
page 62



□ ■
page 63



□ ■ ■
page 64



□ ■ ■
page 64




□ ■ ■
page 65

D LINE MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V

mounting modules	illust.	white	grey	black	page
mounting power rail L: 1000 mm	01	710000	710001	710002	45
mounting power rail L: 2000 mm	01	710003	710004	710005	45
mounting power rail L: 3000 mm	01	710006	710007	710008	45
mounting adapter for lights	02	710045	710046	710047	47
live end feeder left	03	710009	710010	710011	48
live end feeder right side	04	710012	710013	710014	48
electrical straight connector with center feed option	05	710042	710043	710044	49
flexible-connector left-right side	06	710039	710040	710041	49
electrical joint	07	710015	710016	710017	50
mechanical joint	08	710018	710019	710020	50
90°-joint left-right with exchange mechanism	09	710036	710037	710038	51
T-joint left-left-right with exchange mechanism	10	710027	710028	710029	52
T-joint right-right-left with exchange mechanism	11	710030	710031	710032	52
X-joint left-left-right-right	12	710033	710034	710035	53
cover plate built in track	13	710077	-	710079	54
endcap	14	710066	710067	710068	54
ceiling mounting bracket flex	15	710063	710064	710065	55
suspension clamp for track connection	16	710057	710058	710059	56
ceiling suspension rigid [635 mm] with canopy	17	710078	710085	710084	57
extension for ceiling suspension [300 mm]	17	710086	710088	710087	57
wire suspension bracket with ceiling rosette 1500 mm	18	710048	710049	710050	58
rope suspension bracket Mini mit Abhängeseil 5000 mm	19	710094	710095	710096	58
quick mounting bracket for grid ceilings	20	710051	710052	710053	51
wall bracket	21	710104	710105	710106	55
truss adapter silver coloured	22	-	710083	-	59
quick mounting clamp for exhibition stand construction	23	-	-	710082	59
3-circuits adapter for light installation	24	710097	710098	710099	62
3-circuits adapter with Multi CC power supply 250/350/450/500 mA 6,30 - 21,00 W 25-42V	25	862180	-	862183	63
3-circuits adapter with Multi CC power supply 600/700/750/800 mA 15,00 - 33,60 W 25-42V	25	862181	-	862184	63
3-circuits adapter with Multi CC power supply 850/900/950/1050 mA 23,00 - 44,10 W 27-42V	25	862182	-	862185	63
electrical outlet adapter	26	710024	710025	710026	64
mounting adapter for additional components max. 10kg	27	710054	710055	710056	64
signs hook, max. load 5kg	28	710060	710061	710062	65

ILLUSTRATIONS WITH PLANNING-WRELEVANT DIMENSIONS

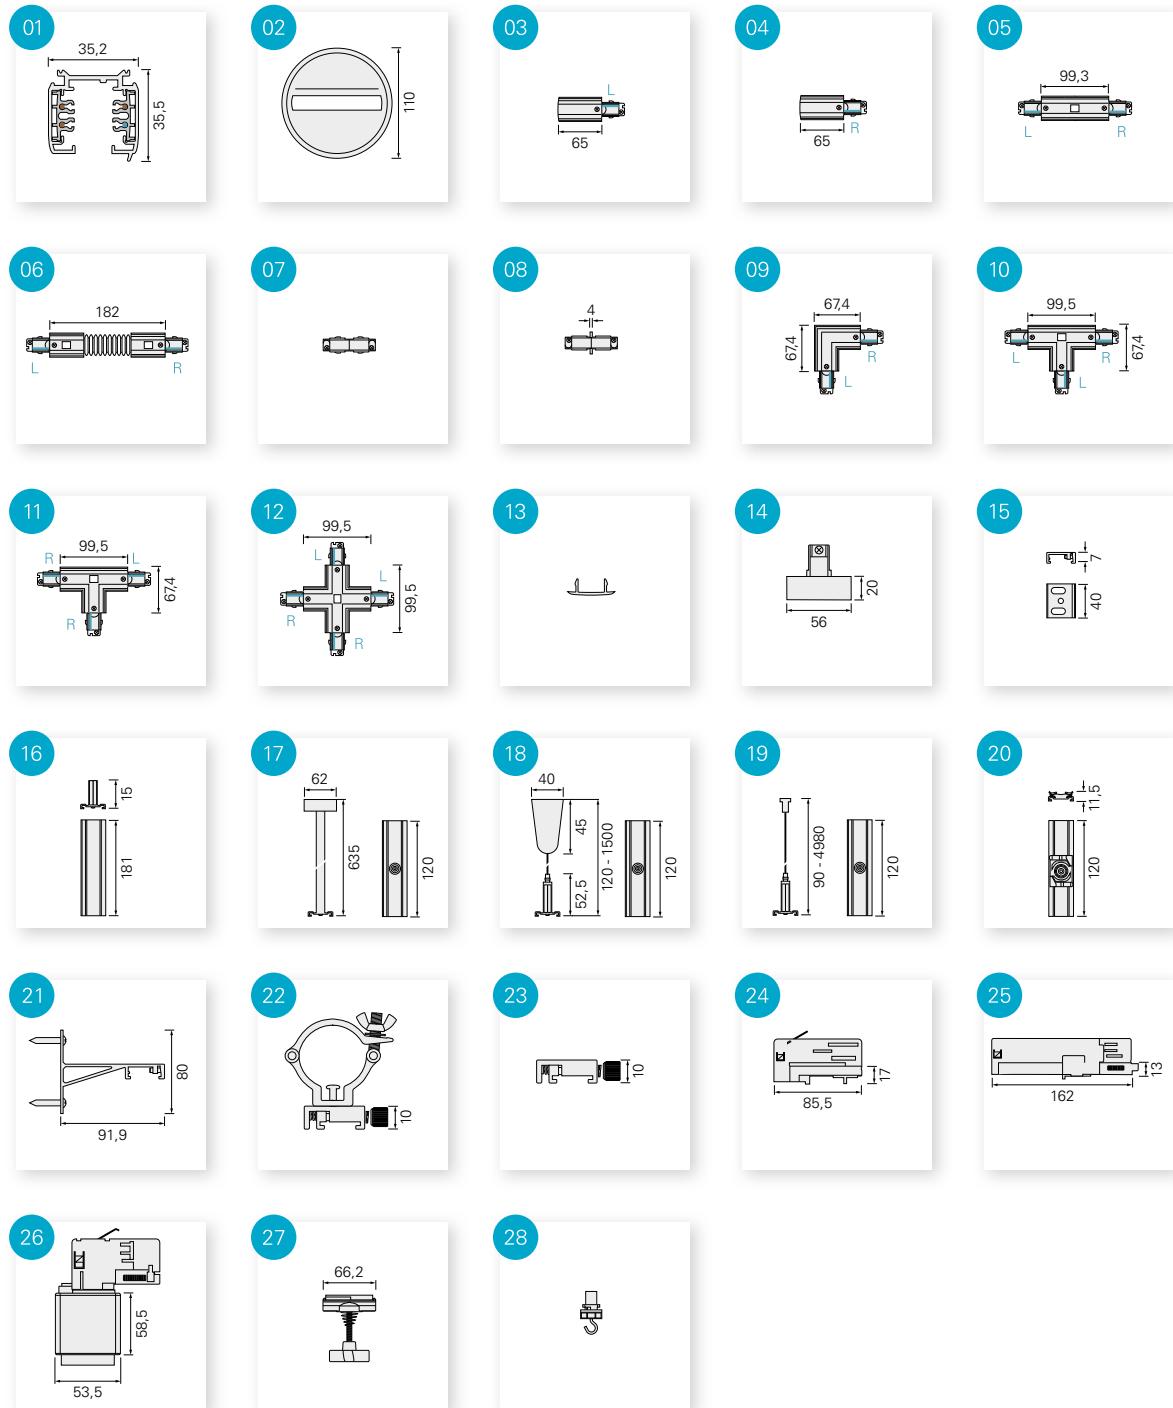

D LINE BUILT IN POWER RAL SYSTEM 3-PHASE 220-440V

built in modules	illust.	white	illust.	cover	page
built in power rail L:1000 mm	01	710069		-	46
built in power rail L: 2000 mm	01	710070		-	46
built in power rail L: 3000 mm	01	710071		-	46
electric feeder left side	02	710009	19	710089	48
electric feeder right side	03	710012	19	710089	48
electrical straight connector with center feed option	04	710042	20	710090	49
electrical joint	05	710015		-	49
mechanical joint	06	710018		-	50
90°-joint left-right	07	710036	21	710091	50
T-joint left-left-right	08	710027	22	710093	51
T-joint right-right-left	09	710030	22	710093	52
X-joint left-left-right-right	10	710033	23	710092	52
cover plate built in track	11	710077			53
endcap	12	710103		-	54
quick-mounting bracket for installation rail	13	710107			54
3-circuits adapter for light installation	14	710097		-	62
3-circuits adapter with Multi CC power supply 250/350/450/500 mA 6,30 - 21,00 W 25-42V	15	862180			63
3-circuits adapter with Multi CC power supply 600/700/750/800 mA 15,00 - 33,60 W 25-42V	15	862181			63
3-circuits adapter with Multi CC power supply 850/900/950/1050 mA 23,00 - 44,10 W 27-42V	15	862182			63
electrical outlet adapter	16	710024		-	64
mounting adapter for additional components max. 10kg	17	710054		-	64
signs hook, max. load 5kg	18	710060		-	65




Unlike other systems, you will not need any additional or special electrical components such as feeders, connectors, corners or T-connectors for the recessed tracks in the future. All standard components of the system are used and only the matching plastic cover is exchanged, and the recessed version is ready. This simplifies stock-keeping and gives significantly more flexibility here as well.




710060

ILLUSTRATIONS WITH PLANNINGRELEVANT DIMENSIONS

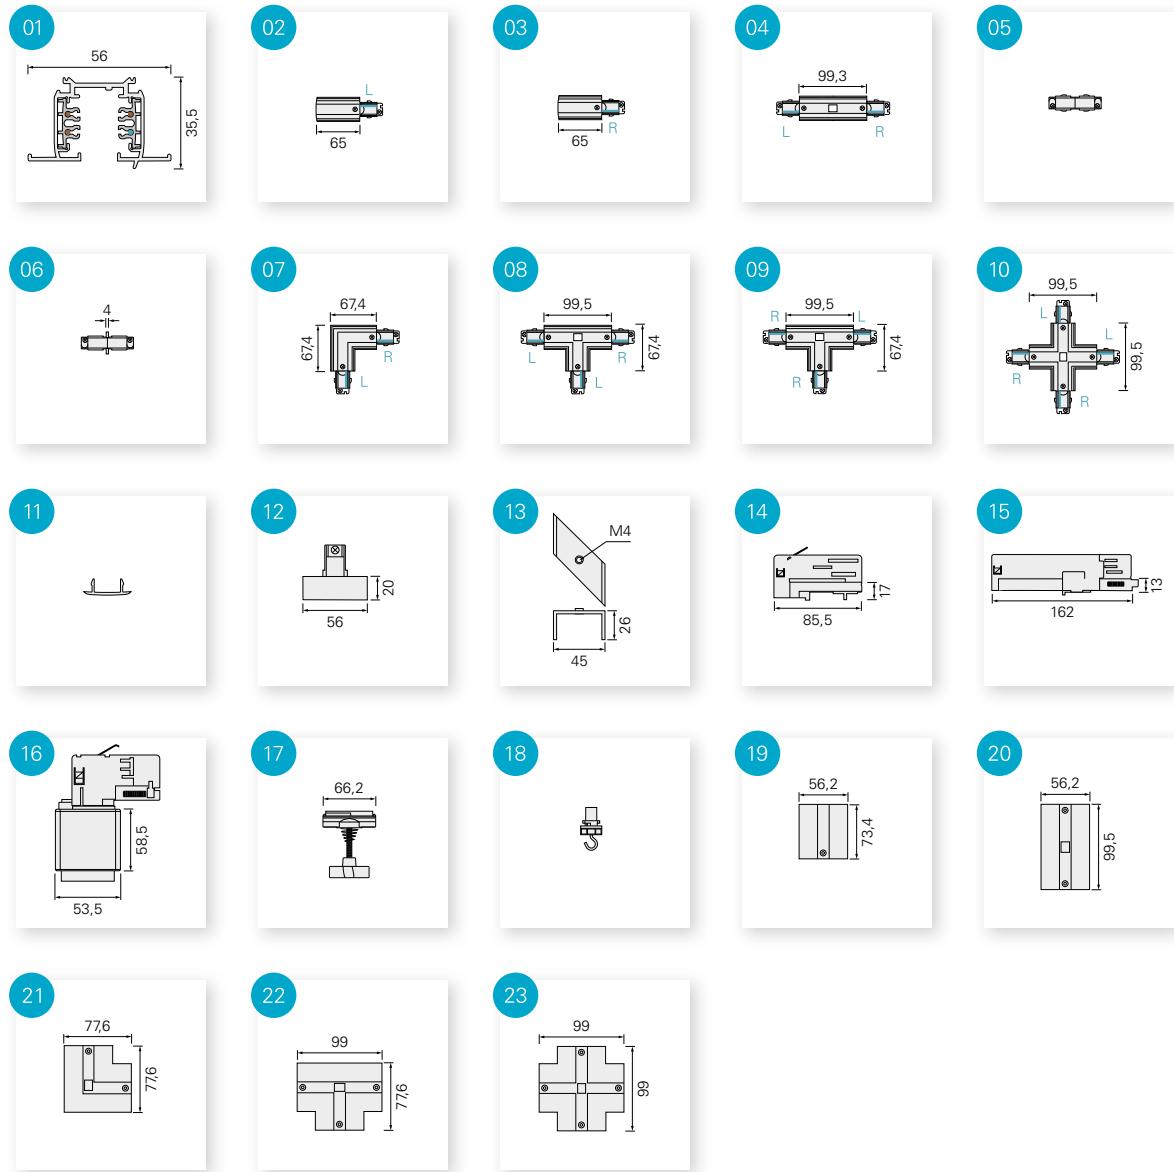


FIXING POINTS

power rail	a	b	c	d
1000 mm	125 mm			
2000 mm	125 mm	998 mm		
3000 mm	125 mm		914 mm	1167 mm

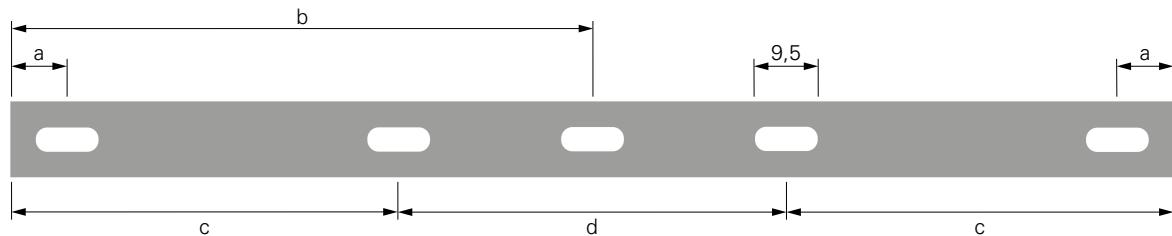


MECHANICAL LOAD TRACK POWER RAIL 1000 MM

50 N $\hat{=}$ 5,09 kg
dimension in mm

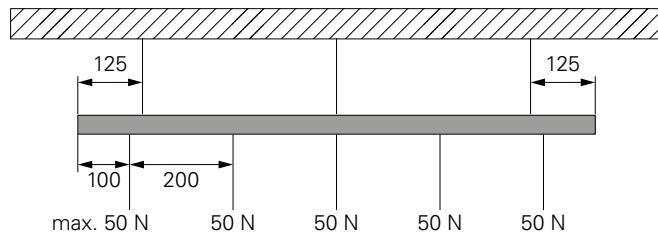


MECHANICAL LOAD TRACK POWER RAIL 2000/3000 MM

50 N $\hat{=}$ 5,09 kg
dimension in mm

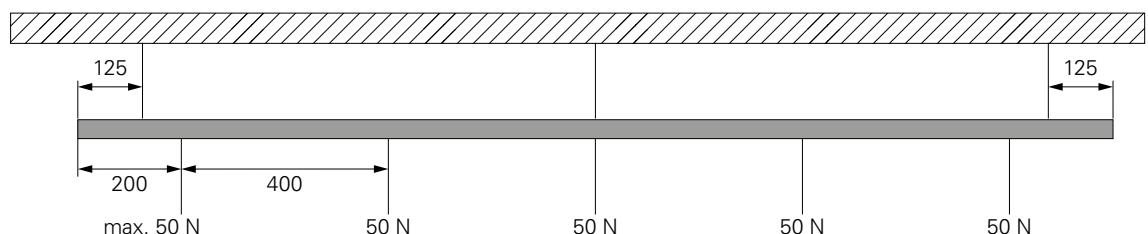


PLANNING GUIDE D LINE MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V

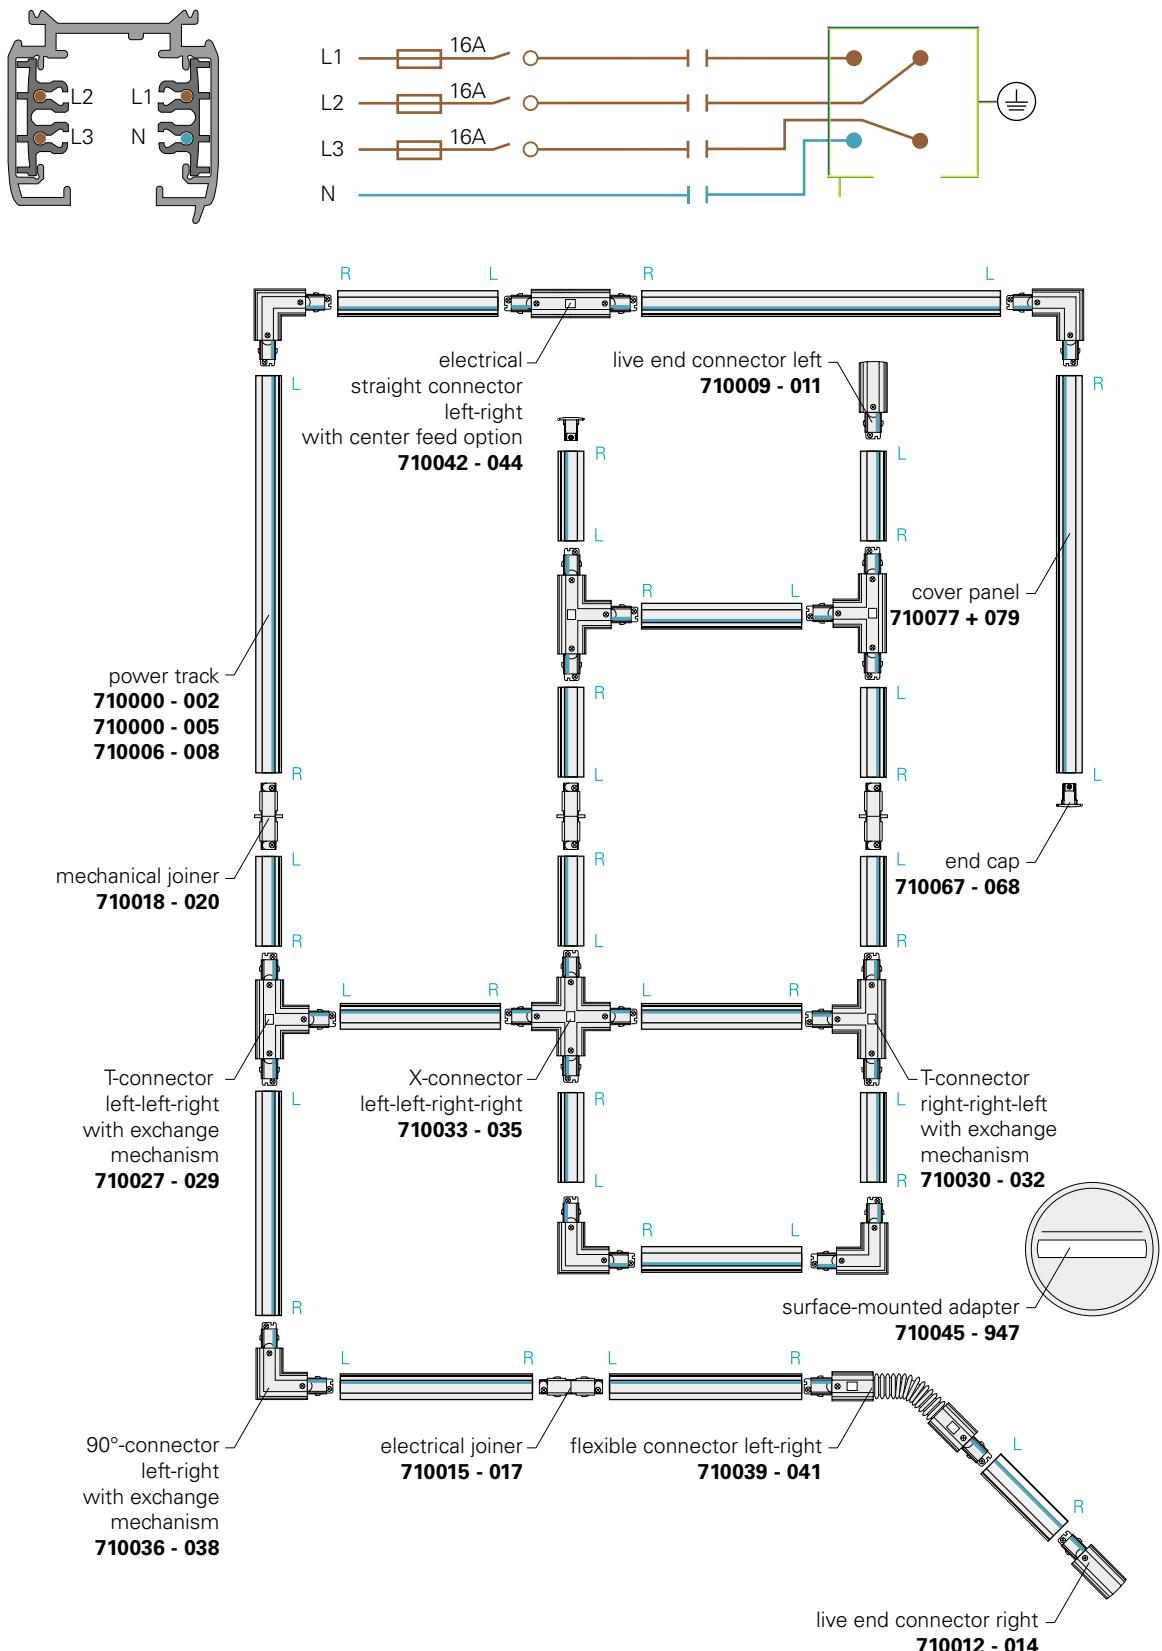


D LINE POWER RAIL SYSTEM 3-PHASE 220-440V

The D LINE track system is available exclusively from DEKO-LIGHT and is extremely easy to plan and install thanks to its components, some of which have been completely redesigned. It is also compatible with all common track adapters and luminaires. The elegant and timeless design is available in white, black and grey, and the wide range

of accessories and mounting components means that there are no limits to its use and installation. Thanks to the interchangeable mechanism of the 90° and T connectors, planning is easier than ever before and the installation of even complex shapes will be child's play in the future.

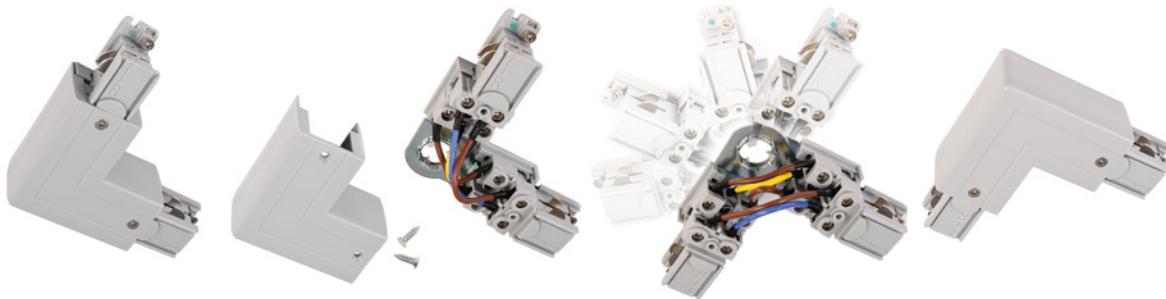

COMPATIBILITY OVERVIEW



D LINE 3-phase track is compatible with the following track lights / adapters:

manufacturer	system name
DEKO-LIGHT	all 3-phase spotlights
Molto Luce	3-Phase-Track*
Global / Nordic	Trac Pro 3*
Ivela	LKM Square / Quadro*
Erco	3-Phasen*
Hoffmeister	3-Phasen*
Zumtobel / Staff	3-Phasen*
Eutrac	One Track*
SLV	S-Track

*compatible with all DEKO-LIGHT 3-phase spotlights, except ALNITAK series [S. 101] and 3-phase adapter with integrated multi-CC power supply [S. 63].

All data without guarantee. Technical data and dimensions are subject to change without prior notice. Check against samples when planning a project to ensure functionality.

Distributed by AMLUX srl, 46042, Castel Goffredo (MN), info@amlux.it, www.amlux.it



D LINE SURFACE-MOUNTED POWER TRACK

- Up to three phases (3x 16 A) can be fed in
- Numerous attachment options

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Length	Price
710000	<input type="checkbox"/> White	1000 mm	44,95 €
710001	<input checked="" type="checkbox"/> Light grey	1000 mm	44,95 €
710002	<input checked="" type="checkbox"/> Black	1000 mm	44,95 €
710003	<input type="checkbox"/> White	2000 mm	89,95 €
710004	<input checked="" type="checkbox"/> Light grey	2000 mm	89,95 €
710005	<input checked="" type="checkbox"/> Black	2000 mm	89,95 €
710006	<input type="checkbox"/> White	3000 mm	129,95 €
710007	<input checked="" type="checkbox"/> Light grey	3000 mm	129,95 €
710008	<input checked="" type="checkbox"/> Black	3000 mm	129,95 €



Accessories for 710000, 710003, 710006

710077 D Line/Dali cover panel for integrated busbar, white

5,95 €

Accessories for 710001, 710002, 710004, 710005, 710007, 710008

710079 D Line/Dali cover panel for integrated busbar, black

5,95 €



D LINE BUILT-IN POWER TRACK

- Up to three phases (3x 16 A) can be fed in
- Suitable for recessed system
- Side wings for optimal ceiling installation

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Width	56 mm	Output Current	16 A

Article	Housing Color	Length	Price
710069	<input type="checkbox"/> White	1000 mm	54,95 €
710070	<input type="checkbox"/> White	2000 mm	99,95 €
710071	<input type="checkbox"/> White	3000 mm	144,95 €



Accessories

710077 D Line/Dali cover panel for integrated busbar, white



5,95 €



D LINE QUICK-MOUNTING BRACKET FOR INSTALLATION RAIL

- Suitable for recessed system
- Simplifies installation of recessed current tracks
- No additional substructure is required for mounting

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Steel	Width	45 mm
Mounting Type	Installation mounting	Height	25 mm
Length	70 mm		

Article	Housing Color	Price
710107	<input type="checkbox"/> Silver	4,95 €





D LINE SURFACE-MOUNTED ADAPTER

- Surface-mounted housing for converting busbar spotlights
- Single phase (1x 16 A) feed
- Easy to install


Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Ø	110 mm
Mounting Type	Top mounting	Rated Input Voltage	220-240 V/AC
Height	35 mm	Output Current	16 A

Article	Housing Color	Price
710045	<input type="checkbox"/> White	29,95 €
710046	<input checked="" type="checkbox"/> Light grey	29,95 €
710047	<input checked="" type="checkbox"/> Black	29,95 €





D LINE ELECTRIC FEEDER LEFT


- Up to three phases (3x 16 A) can be fed in
- Power can be fed in from above (ceiling) or from the side
- Suitable for surface-mounted and recessed systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	98.5 mm	Output Current	16 A
Width	35.2 mm		

Article	Housing Color	Price
710009	<input type="checkbox"/> White	15,95 €
710010	<input checked="" type="checkbox"/> Light grey	15,95 €
710011	<input type="checkbox"/> Black	15,95 €



D LINE ELECTRIC FEEDER RIGHT

- Up to three phases (3x 16 A) can be fed in
- Power can be fed in from above (ceiling) or from the side
- Suitable for surface-mounted and recessed systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	98.5 mm	Output Current	16 A
Width	35.2 mm		

Article	Housing Color	Price
710012	<input type="checkbox"/> White	15,95 €
710013	<input checked="" type="checkbox"/> Light grey	15,95 €
710014	<input type="checkbox"/> Black	15,95 €




Accessories

710089 D Line cover panel feed left/right



3,95 €

Distributed by AMLUX srl, 46042, Castel Goffredo (MN), info@amlux.it, www.amlux.it



D LINE ELECTRICAL LONGITUDINAL CONNECTOR WITH FEED OPTION

- Up to three phases (3x 16 A) can be fed in
- Power supply from above (from ceiling)
- Suitable for surface-mounted and recessed systems

Application Area

Home / Living, Shop / Retail / Sales area


Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	166 mm	Output Current	16 A
Width	35 mm		

Article	Housing Color	Price
710042	<input type="checkbox"/> White	32,95 €
710043	<input checked="" type="checkbox"/> Light grey	32,95 €
710044	<input type="checkbox"/> Black	32,95 €



Accessories

710090 D Line/Dali cover panel for longitudinal connector, white  **3,95 €**



D LINE FLEX CONNECTOR LEFT-RIGHT

- Compensates for height or angle differences within a track system
- Suitable for surface-mounted systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	248 mm	Output Current	16 A
Width	35 mm		

Article	Housing Color	Price
710039	<input type="checkbox"/> White	42,95 €
710040	<input checked="" type="checkbox"/> Light grey	42,95 €
710041	<input type="checkbox"/> Black	42,95 €





D LINE ELECTRIC CONNECTOR

- suitable for surface-mounted and recessed systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	26.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	68 mm	Output Current	16 A
Width	20.5 mm		

Article	Housing Color	Price
710015	<input type="checkbox"/> White	9,95 €
710016	<input checked="" type="checkbox"/> Light grey	9,95 €
710017	<input type="checkbox"/> Black	9,95 €



IP20



IEC



D LINE MECHANICAL CONNECTOR

- Mechanical connector without electrical contacts
- For electrical separation of two different power circuits within one track system
- Suitable for surface-mounted and recessed systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Width	20 mm
Mounting Type	Top mounting	Height	27 mm
Length	66.4 mm		



Article	Housing Color	Price
710018	<input type="checkbox"/> White	6,95 €
710019	<input checked="" type="checkbox"/> Light grey	6,95 €
710020	<input type="checkbox"/> Black	6,95 €



IP20



IEC

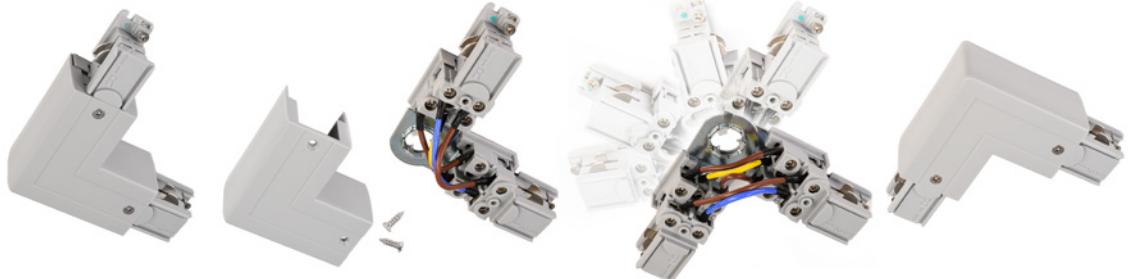

D LINE 90° CONNECTOR LEFT-RIGHT WITH REVERSAL MECHANISM

- With reversal mechanism for switching the orientation between left and right
- Suitable for surface-mounted and recessed systems

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	100.7 mm	Output Current	16 A
Width	100.7 mm		

Article	Housing Color	Price
710036	<input type="checkbox"/> White	34,95 €
710037	<input checked="" type="checkbox"/> Light grey	34,95 €
710038	<input type="checkbox"/> Black	34,95 €




Accessories

710091 D Line/Dali cover panel for 90° connector, white



3,95 €

Distributed by AMLUX srl, 46042, Castel Goffredo (MN), info@amlux.it, www.amlux.it



D LINE T-CONNECTOR LEFT-LEFT-RIGHT WITH REVERSAL MECHANISM


- with reversal mechanism for switching the orientation between left / right
- suitable for surface-mounted and recessed systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	166 mm	Output Current	16 A
Width	101 mm		

Article	Housing Color	Price
710027	<input type="checkbox"/> White	49,95 €
710028	<input checked="" type="checkbox"/> Light grey	49,95 €
710029	<input checked="" type="checkbox"/> Black	49,95 €



D LINE T-CONNECTOR RIGHT/RIGHT/LEFT WITH EXCHANGE MECHANICS

- with reversal mechanism for switching the orientation between left / right
- suitable for surface-mounted and recessed systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	166 mm	Output Current	16 A
Width	101 mm		

Article	Housing Color	Price
710030	<input type="checkbox"/> White	49,95 €
710031	<input checked="" type="checkbox"/> Light grey	49,95 €
710032	<input checked="" type="checkbox"/> Black	49,95 €




Accessories

710093 D Line/Dali cover panel for T-connector, white




3,95 €

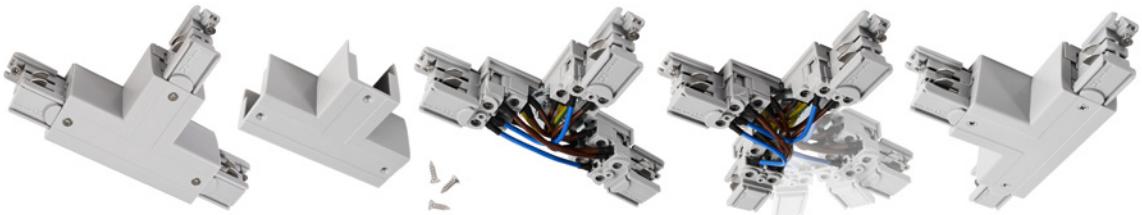

D LINE X-CONNECTOR LEFT-LEFT-RIGHT-RIGHT

- Easy to install
- Suitable for surface-mounted and recessed systems



Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	166 mm	Output Current	16 A
Width	166 mm		

Article	Housing Color	Price
710033	<input type="checkbox"/> White	66,95 €
710034	<input checked="" type="checkbox"/> Light grey	66,95 €
710035	<input type="checkbox"/> Black	66,95 €



Accessories

710092 D Line/Dali cover panel for X-connector, white



4,95 €

Distributed by AMLUX srl, 46042, Castel Goffredo (MN), info@amlux.it, www.amlux.it



D LINE COVER PANEL

- Suitable for surface-mounted and recessed systems
- For sealing publicly accessible busbars within a contact zone of less than 2.30 m

Housing	Plastic	Width	21.5 mm
Mounting Type	Top mounting	Height	7.5 mm
Length	1000 mm		

Article	Housing Color	Price
710077	<input type="checkbox"/> White	5,95 €
710079	<input checked="" type="checkbox"/> Black	5,95 €



D LINE END CAP

- For closing open current track ends (touch protection)
- Easy to install
- Suitable for surface-mounted systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	32.5 mm
Article	Housing Color	Mounting Type	Length

710066	<input type="checkbox"/> White	Top mounting	31.3 mm	35.2 mm	2,95 €
710067	<input checked="" type="checkbox"/> Light grey	Top mounting	31.3 mm	35.2 mm	2,95 €
710068	<input checked="" type="checkbox"/> Black	Top mounting	31.3 mm	35.2 mm	2,95 €
710103	<input type="checkbox"/> White	Installation mounting	56 mm	47.9 mm	2,95 €



D LINE MOUNTING BRACKET FLEX

- Suitable for surface-mounted systems
- Simplifies installation of complex shapes
- Current track can still be slid during installation

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	33.8 mm
Mounting Type	Top mounting	Height	12.5 mm
Length	40 mm		

Article	Housing Color	Price
710063	<input type="checkbox"/> White	5,95 €
710064	<input checked="" type="checkbox"/> Light grey	5,95 €
710065	<input type="checkbox"/> Black	5,95 €



D LINE WALL BRACKET

- Suitable for surface-mounted systems
- Simplifies installation of current tracks near walls
- Ideal for illuminating pictures and objects, for example in exhibitions, collections and museums



Application Area

Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	25 mm
Mounting Type	Top mounting	Height	80 mm
Length	91.9 mm		

Article	Housing Color	Price
710104	<input type="checkbox"/> White	14,95 €
710105	<input checked="" type="checkbox"/> Light grey	14,95 €
710106	<input type="checkbox"/> Black	14,95 €

IP20



D LINE SUSPENSION CONNECTION BRACKET

- Suitable for surface-mounted systems
- For chain installation or similar (chain not included in the scope of delivery)

Housing	Metal	Width	32 mm
Mounting Type	Top mounting	Height	20 mm
Length	181 mm		

Article	Housing Color	Price
710057	<input type="checkbox"/> White	9,95 €
710058	<input checked="" type="checkbox"/> Light grey	9,95 €
710059	<input type="checkbox"/> Black	9,95 €

Distributed by AMLUX srl, 46042, Castel Goffredo (MN), info@amlux.it, www.amlux.it



D LINE CEILING SUSPENSION RIGID

- Sturdy, elegant ceiling hanger
- Suitable for surface-mounted systems
- Hanger dimension 635 mm (can be shortened to 335 mm)
- Hanger can be extended with accessories

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Length	635 mm
Mounting Type	Top mounting	Width	60 mm

Article	Housing Color	Price
710078	<input type="checkbox"/> White	32,95 €
710084	<input checked="" type="checkbox"/> Black	32,95 €
710085	<input type="checkbox"/> Light grey	32,95 €



D LINE EXTENSION FOR CEILING SUSPENSION RIGID

- Suitable for rigid ceiling hangers
- Extends the hanger length by 300 mm

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Length	310 mm
Mounting Type	Top mounting	Width	10 mm

Article	Housing Color	Price
710086	<input type="checkbox"/> White	5,95 €
710087	<input checked="" type="checkbox"/> Black	5,95 €
710088	<input type="checkbox"/> Light grey	5,95 €



D LINE ROPE SUSPENSION BRACKET

- Can be cut to length for suspension dimension: 120-1,500 mm
- suitable for surface-mounted systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Mounting Type	Top mounting	Height	52 mm
Length	120 mm		

Article	Housing Color	Price
710048	<input type="checkbox"/> White	14,95 €
710049	<input checked="" type="checkbox"/> Light grey	14,95 €
710050	<input checked="" type="checkbox"/> Black	14,95 €

Accessories

710081 D Line/Dali cable for cable suspension 4.0 m



7,95 €



D LINE ROPE SUSPENSION BRACKET MINI

- Stylish and sophisticated suspended mounting
- Can be cut to length for hanger lengths: 90-4,960 mm
- Suitable for surface-mounted systems

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Mounting Type	Top mounting	Height	58 mm
Length	120 mm		

Article	Housing Color	Price
710094	<input type="checkbox"/> White	19,95 €
710095	<input checked="" type="checkbox"/> Light grey	19,95 €
710096	<input checked="" type="checkbox"/> Black	19,95 €

Distributed by AMLUX srl, 46042, Castel Goffredo (MN), info@amlux.it, www.amlux.it



D LINE FAST-MOUNTING BRACKET

- Suitable for surface-mounted systems
- Current track can be installed without tools using knurled thumb screw and spring clamps
- Quick installation and removal for e.g. trade fair construction

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Mounting Type	Top mounting	Height	11.9 mm
Length	40 mm		

Article	Housing Color	Price
710082	<input checked="" type="checkbox"/> Black	10,95 €



D LINE TRUSS ADAPTER

- Suitable for surface-mounted systems
- Quick-action couplers for fast mounting of current tracks on cross rail structures
- Fits all 50 mm aluminium cross rails in event/trade fair construction

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Mounting Type	Top mounting	Height	11.9 mm
Length	40 mm		

Article	Housing Color	Price
710083	<input type="checkbox"/> Silver	29,95 €

Distributed by AMLUX srl, 46042, Castel Goffredo (MN), info@amlux.it, www.amlux.it



This little »jack-of-all-trades« makes mounting a track on an existing grid ceiling child's play. The installation time is only a fraction of what it used to be. In the first step, the clip is simply clicked into the visible metal strips of the grid ceiling and is held bomb-proof on the ceiling by means of a safety spring clip. After that, the conductor rail is simply pushed onto it and the installation is finished.





D LINE GRID CEILING FAST-MOUNTING BRACKET

- Suitable for surface-mounted systems
- Quick and easy to install on grid ceilings
- Mechanical load up to 15.0 kg/150 N
- Suitable for 22-24 mm ceiling grid support rails

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Mounting Type	Top mounting	Height	11 mm
Length	120 mm		

Article	Housing Color	Price
710051	<input type="checkbox"/> White	11,95 €
710052	<input checked="" type="checkbox"/> Light grey	11,95 €
710053	<input type="checkbox"/> Black	11,95 €






D LINE 3-PHASE ADAPTER FOR LIGHT INSTALLATION

- Suitable for surface-mounted and recessed systems
- Includes reduction bush, M10 flat nut and strain relief grommet
- Easy to install
- Integrated secondary drop protection
- Max. load 10 kg/100 N

Housing	Plastic	Height	54 mm
Mounting Type	Top mounting	Rated Input Voltage	220-240 V/AC
Length	84 mm	Output Current	10 A
Width	32 mm		

Article	Housing Color	Price
710097	<input type="checkbox"/> White	18,95 €
710098	<input checked="" type="checkbox"/> Light grey	18,95 €
710099	<input checked="" type="checkbox"/> Black	18,95 €



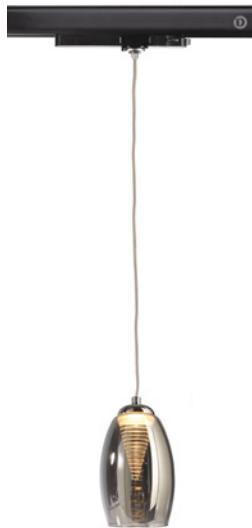

D LINE THREE-PHASE ADAPTER WITH INTEGRATED MULTI CC POWER SUPPLY

- Suitable for surface-mounted and recessed systems
- Integrated secondary drop protection
- Supplied with trumpet nipple and M10 flat nut
- Stable integrated adjustable power supply [CC]
- Check suitability of the intended lamp
- Max. 10 kg/100 N
- Exclusively for D LINE, Ivela and Hoffmeister three-phase current tracks

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	41 mm
Length	162 mm	Rated Input Voltage	220-240 V/AC
Width	31 mm	Mounting Location	Inside

Article		Output Current Selectable	Power	Output Voltage	Price
862180	<input type="checkbox"/>	250 mA / 350 mA / 450 mA / 500 mA	6.2-21.0 W	25-42 V/DC	32,95 €
862183	<input checked="" type="checkbox"/>	250 mA / 350 mA / 450 mA / 500 mA	6.2-21.0 W	25-42 V/DC	32,95 €
862181	<input type="checkbox"/>	600 mA / 700 mA / 750 mA / 800 mA	15.0-33.0 W	25-42 V/DC	35,95 €
862184	<input checked="" type="checkbox"/>	600 mA / 700 mA / 750 mA / 800 mA	15.0-33.0 W	25-42 V/DC	35,95 €
862182	<input type="checkbox"/>	850 mA / 900 mA / 950 mA / 1050 mA	22.0-44.0 W	27-42 V/DC	37,95 €
862185	<input checked="" type="checkbox"/>	850 mA / 900 mA / 950 mA / 1050 mA	22.0-44.0 W	27-42 V/DC	37,95 €





D LINE SOCKET ADAPTER

- easy to install
- suitable for surface-mounted and recessed systems
- as power distribution system in current tracks
- max. 1,380 W
- integrated plug fuse

Housing	Plastic	Width	53.5 mm
Mounting Type	Top mounting, Installation mounting	Height	103 mm
Length	58.5 mm	Rated Input Voltage	230 V/AC
		Output Current	6 A

Article	Housing Color	Price
710024	<input type="checkbox"/> White	28,95 €
710025	<input checked="" type="checkbox"/> Light grey	28,95 €
710026	<input checked="" type="checkbox"/> Black	28,95 €



D LINE MOUNTING ADAPTER FOR ADDITIONAL COMPONENTS

- Suitable for surface-mounted and recessed systems
- Mounting adapter (M6 thread) for holding additional devices and lights
- Ideal for use with optional D Line socket adapter
- Load max. 10 kg/100 N

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Metal, Plastic	Width	31.5 mm
Mounting Type	Top mounting	Height	84 mm
Length	66.5 mm		

Article	Housing Color	Price
710054	<input type="checkbox"/> White	10,95 €
710055	<input checked="" type="checkbox"/> Light grey	10,95 €
710056	<input checked="" type="checkbox"/> Black	10,95 €



D LINE SIGN HOOK

- Suitable for surface-mounted and recessed systems
- Hook for attaching information signs etc.
- Load max. 5kg / 50N

Application Area

Home / Living, Shop / Retail / Sales area

Housing	Plastic, Steel	Height	52 mm
Mounting Type	Top mounting	Ø	25 mm

Article	Housing Color	Price
710060	<input type="checkbox"/> White	2,95 €
710061	<input checked="" type="checkbox"/> Light grey	2,95 €
710062	<input checked="" type="checkbox"/> Black	2,95 €

Distributed by AMLUX srl, 46042, Castel Goffredo (MN), info@amlux.it, www.amlux.it