



Discharge - CSR Turn and Lock (TAL)

CSR700/TAL/PGJX28

78718

Product information

These single-ended metal halide lamps are especially useful for moving-light applications that call for high colour temperatures and brighter light sources. The 'Turn And Lock' technology provides easy installation. A very short arc gap allows for higher beam intensity. This enables good system performance, colour stability and superior lumen maintenance over life. Easy release base (Turn And Lock) enabling quick lamp change at events- High lumen output.







Product data

PGJX28
Globe
Clear
18
112
56
4
51
111
U - Universal
General Electric (GE)

Performance data

747
75
7400
50000
4
).3
0.31
700
70

Electrical data

Weighted energy consumption [kWh/1000h]	770
Lamp Current [A]	10
Dimming Capability	Yes
Ballast Required	Yes







Logistic data

DUN Code	10043168787182
EAN Code	0043168787185
Pack Quantity	4
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	96 EUR, 120 UK
Layer quantity EUR	96
Layer quantity UK	120
Pallet quantity EUR (PC)	480
Pallet quantity UK (PC)	600
Outer case size	175 x 175 x 210 (mm)
Product status	Available

Application areas



Technical drawing

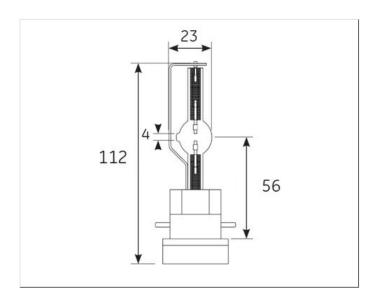





Discharge - CSR Turn and Lock (TAL)

CSR700/TAL/PGJX28

78718

Downloads & Links

Go to the catalog site (HTTP)

Entertainment Solution Spectrum Catalogue (PDF)

Lighting design tools & calculators (HTTP)

Disclaimer

Special Purpose Lamp, Not suited for household illumination